

ORLEANS MARINA HARBORMASTER OFFICE RENOVATIONS

Project # E04-22-07

VRA No: 22052

VergesRome Architects

New Orleans, Louisiana



320 N. Carrollton Avenue, Suite 100
New Orleans, Louisiana 70119
t: 504.488.7739 f: 504.488.7743

28 SEPTEMBER 2023

PROJECT MANUAL FOR:

**ORLEANS MARINA
HARBOURMASTER
OFFICE RENOVATIONS
Project # E04-22-07**

VRA Project No. 22052

ARCHITECT:

VergesRome Architects, APAC
320 No. Carrollton Avenue, Suite 100
New Orleans, LA 70119
T. 504.488.7739
F. 504.488.7743
Contact: David Reed, AIA

MECHANICAL ENGINEERS

Damien W. Serauskas, P.E.
15 Cypress Point Lane
New Orleans, LA, 70131
T. 504.866.2600
Contact: Damien W. Serauskas, P.E.

28 September 2023

ORLEANS MARINA HARBOURMASTER OFFICE RENOVATIONS

TABLE OF CONTENTS

Division	Section Title	Pages
DIVISION 0 – CERTIFICATION		
00 00 08	CERTIFICATION OF RESPONSIBILITY FOR DOCUMENT PREPARATION	2

PROCUREMENT AND CONTRACTING REQUIREMENTS GROUP

DIVISION 00 – PROCUREMENT AND CONTRACTING REQUIREMENTS Page No.

PROCUREMENT AND CONTRACTING REQUIREMENTS

	ADVERTISEMENT FOR BID	ADV-1 thru ADV-2
	INSTRUCTIONS TO BIDDERS	INS-1 thru INS-11
	LOUISIANA UNIFORM PUBLIC WORKS BID FORM	BF-1
	BID BOND	BB-1
	ATTESTATIONS AFFIDAVIT	ATT-1 thru ATT-2
	CONTRACT BETWEEN OWNER & CONTRACTOR, PERFORMANCE AND PAYMENT BOND, AFFIDAVIT	CONT-1 thru CONT-8
00 26 00	PROCUREMENT SUBSTITUTION PROCEDURES	2

SPECIFICATIONS GROUP

GENERAL REQUIREMENTS SUBGROUP Page No.

PART I – GENERAL PROVISIONS

GP-1	DEFINITIONS OF TERMS	1
GP-2	CONTACT INFORMATION	4
GP-3	LAWS, REGULATIONS, STANDARDS, SPECIFICATIONS, AND CODES	5
GP-4	INSURANCE AND BONDS	6
GP-5	NOTICE TO PROCEED AND CONTRACT TIME	10
GP-6	WORK PLAN	10
GP-7	PROGRESS SCHEDULE	11
GP-8	DAILY PROGRESS REPORTS	12
GP-9	HURRICANE AND SEVERE STORM PLAN	13
GP-10	HEALTH AND SAFETY PLAN AND INSPECTIONS	13
GP-11	PROGRESS MEETINGS AND REPORTS	14
GP-12	PRE-CONSTRUCTION CONFERENCE	14
GP-13	CONTRACT INTENT	14
GP-14	ENGINEER AND AUTHORITY OF ENGINEER	14
GP-15	CONFORMITY WITH PLANS AND SPECIFICATIONS	15
GP-16	CLARIFICATIONS AND AMENDMENTS TO CONTRACT DOCUMENTS	15
GP-17	SUBCONTRACTS	15
GP-18	WORKERS, METHODS, AND EQUIPMENT	16
GP-19	ACCIDENT PREVENTION, INVESTIGATIONS, AND REPORTING	17
GP-20	PRESERVATION AND RESTORATION OF PROPERTY, MONUMENTS, ETC.	17
GP-21	PROTECTION OF THE WORK, MATERIALS, AND EQUIPMENT	17
GP-22	LAND RIGHTS	17
GP-23	UTILITIES	18
GP-24	PERMITS	18

GP-25	PROJECT SITE CLEAN-UP	18
GP-26	OWNER INSPECTION	18
GP-27	DUTIES OF RESIDENT PROJECT REPRESENTATIVE	19
GP-28	CONSTRUCTION STAKES, LINES, AND GRADES	19
GP-29	CONTRACTOR'S RESPONSIBILITY FOR WORK	19
GP-30	ENVIRONMENTAL PROTECTION	19
GP-31	SANITARY PROVISION	20
GP-32	PAYMENT OF TAXES	20
GP-33	RADIO AND TELEPHONES	21
GP-34	NAVIGATION	21
GP-35	OBSTRUCTION TO NAVIGATION	21
GP-36	MARINE VESSELS AND MARINE ACTIVITIES	21
GP-37	(RESERVED)	22
GP-38	(RESERVED)	22
GP-39	(RESERVED)	22
GP-40	RECORD KEEPING	22
GP-41	CERTIFICATES OF COMPLIANCE	22
GP-42	SUBMITTALS	22
GP-43	CLAIMS FOR EXTRA COST	23
GP-44	ALTERATION OF THE CONTRACT AND COMPENSATION	23
GP-45	EXTENSION OF CONTRACT TIME	24
GP-46	TIME EXTENTIONS FOR UNUSUALLY SEVERE WEATHER	24
GP-47	OWNER'S RIGHT TO TERMINATE CONTRACT FOR CAUSE OR CONVENIENCE	24
GP-48	TEMPORARY SUSPENSION OF WORK	26
GP-49	NON-CONFORMING AND UNAUTHORIZED WORK	26
GP-50	CONTRACTOR'S RIGHT TO TERMINATE CONTRACT	26
GP-51	BREACH OF CONTRACT	26
GP-52	NO WAIVER OF LEGAL RIGHTS	26
GP-53	LIABILITY FOR DAMAGES AND INJURIES	27
GP-54	LIABILITY FOR LOSSES BY ACTS OF THE GOVERNMENT	27
GP-55	SUBSTANTIAL COMPLETION AND NOTICE OF ACCEPTANCE	27
GP-56	FINAL INSPECTION AND ACCEPTANCE	29
GP-57	AS-BUILT DRAWINGS	29
GP-58	COMPLETION OF CONTRACT	29
GP-59	CONTRACTOR'S GUARANTEE	29
GP-60	DISPUTE RESOLUTION	30
GP-61	PAYMENT	30
GP-62	PAYMENTS WITHHELD	31
GP-63	LIENS	32
GP-64	DISADVANTAGED BUSINESS ENTERPRISES	32
GP-65	EQUAL EMPLOYMENT OPPORTUNITY	33
GP-66	ANTI-KICKBACK CLAUSE	33
GP-67	SUSPENSION/DEBARMENT	33
GP-68	LOUISIANA FIRST HIRING ACT	34
PART II SPECIAL PROVISIONS		35
SP-1	LOCATION OF WORK	35
SP-2	PLACEHOLDER	35

FACILITY CONSTRUCTION SUBGROUP**Pages****DIVISION 01 – GENERAL REQUIREMENTS**

01 10 00	SUMMARY	3
----------	---------	---

DIVISIONS 02 - 04 (NOT USED)

DIVISION 05 – METALS

05 52 13 PIPE AND TUBE RAILINGS 9

DIVISION 06 – WOOD, PLASTICS AND COMPOSITES (NOT USED)**DIVISION 07 – THERMAL AND MOISTURE PROTECTION**

07 62 00 SHEET METAL FLASHING AND TRIM 5
07 92 00 JOINT SEALANTS 7

DIVISION 08 – OPENINGS (NOT USED)**DIVISION 09 - FINISHES**

09 65 13 RESILIENT BASE AND ACCESSORIES 2
09 68 13 TILE CARPETING 5
09 91 13 EXTERIOR PAINTING 6
09 91 23 INTERIOR PAINTING 3

DIVISION 10 – 50 (NOT USED)**END OF TABLE OF CONTENTS**


SECTION 00 00 08 – CERTIFICATION OF RESPONSIBILITY FOR DOCUMENT PREPARATION

**ORLEANS MARINA HARBOURMASTER
OFFICE RENOVATIONS**

ARCHITECTURAL SPECIFICATIONS

The following specification sections included in this Project Manual were prepared by or under the responsible supervision of the company listed below:

00 26 00	PROCUREMENT SUBSTITUTION PROCEDURES
01 10 00	SUMMARY
05 52 13	PIPE AND TUBE RAILINGS
07 62 00	SHEET METAL FLASHING AND TRIM
07 92 00	JOINT SEALANTS
09 65 13	RESILIENT BASE AND ACCESSORIES
09 68 13	TILE CARPETING
09 91 13	EXTERIOR PAINTING
09 91 23	INTERIOR PAINTING

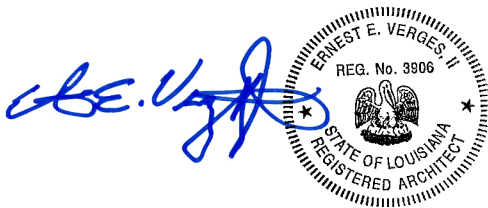

Ernest E. "Chip" Verges, II, AIA
VergesRome Architects

This page intentionally left blank.

ADVERTISEMENT FOR BIDS

Sealed bids will be received by the Lakefront Management Authority (LMA), 6001 Stars & Stripes Blvd., Suite 219, New Orleans, Louisiana 70126 until 2:00 p.m. on October 23, 2023.

FOR: **Orleans Marina Harbormaster Office Renovations**

Complete Bid Documents for this project are available in electronic and printed form. Printed bid documents are available upon payment of forty dollars (\$40.00) per set. Payment for drawings is non-refundable. Electronic bid documents may be obtained without charge and without deposit at **Nolalakefront.com** as well as **Centrallauctionhouse.com**. Bid Documents may be obtained from:

VergesRome Architects
320 N. Carrollton Avenue
New Orleans, LA 70119
Attn: David Reed
Email: david@vergesrome.com &
sarah@vergesrome.com
Phone: 504.488.7739

All bids shall be accompanied by bid security in the form of certified check, cashier's check, or Bid Bond as prescribed by LA RS 38:2218.A.C, in the amount equal to at least five percent (5%) of the total amount bid and payable without conditions to the Owner as a guarantee that the Bidder, if awarded the Contract, will promptly execute a Contract in accordance with bid proposal and all terms and conditions of the Bid Documents.

The successful Bidder shall be required to furnish a Performance and Payment Bond written as described in the Instructions to Bidders included in the Bid Documents for this project.

A NON-MANDATORY PRE-BID CONFERENCE WILL BE HELD
at 10:00 AM CST on October 11, 2023 at the
Orleans Marina – Harbormaster Building
221 Lake Marina Ave, New Orleans, LA 70124.

Bids shall be accepted only from those bidders who attend the Mandatory Pre-Bid Conference in its entirety. A **highly-encouraged jobsite visit** will be held following the Pre-Bid Conference. The jobsite visit is not mandatory, but it is highly encouraged for those submitting a bid. The jobsite visit being conducted by LMA will facilitate access to project features that are located on private property. Outside of the recommended site visit, the Contractor may not have access to the features located on private property.

ANY PERSON REQUIRING SPECIAL ACCOMMODATIONS SHALL NOTIFY LMA OF THE TYPE(S) OF ACCOMMODATION REQUIRED NOT LESS THAN SEVEN (7) DAYS BEFORE THE BID OPENING.

Contact the Lakefront Management Authority at (504) 355-5990 if directions are needed to the Mandatory Pre-Bid Conference or the highly encouraged Jobsite Visit.

Bids shall be accepted from Contractors who are licensed under LA. R.S. 37:2150-2163 for the classification of **Building Construction**.

The Owner reserves the right to reject any and all bids for just cause. In accordance with La. R.S. 38:2212 (A)(1)(b), the provisions and requirements of this Section, those stated in the advertisement bids, and those required on the bid form shall not be considered as informalities and shall not be waived by any public entity.

SECTION INSTRUCTIONS TO BIDDERS

ARTICLE 1 – DEFINITIONS

- 1.1 The Bid Documents include the following:
- Advertisement for Bids
 - Instructions to Bidders
 - Bid Form
 - Bid Bond
 - Contract Between Owner and Contractor
 - Performance and Payment Bond
 - Affidavit
 - General Provisions
 - Special Provisions
 - User Agency Documents (if applicable)
 - Other Documents (if applicable)
 - Addenda issued during the bid period and acknowledged in the Bid Form
- 1.2 All definitions set forth in the General Provisions and the Special Provisions of the Contract are applicable to the Bid Documents, unless otherwise specifically stated or written.
- 1.3 Addenda are written, and/or graphic instruments issued by the Engineer prior to the opening of bids which modify or interpret the Bid Documents by additions, deletions, clarifications, corrections and prior approvals.
- 1.4 A bid is a complete and properly signed proposal to do the work or designated portion thereof for the sums stipulated therein supported by data called for by the Bid Documents.
- 1.5 Base bid is the sum stated in the bid for which the Bidder offers to perform the work described as the base, to which work may be added, or deleted for sums stated in alternate bids.
- 1.6 An alternate bid (or alternate) is an amount stated in the bid to be added to the amount of the base bid if the corresponding change in project scope or materials or methods of construction described in the Bid Documents is accepted.
- 1.7 A Bidder is one who submits a bid for a prime Contract with the Owner for the work described in the Bid Documents.
- 1.8 A Sub-bidder is one who submits a bid to a Bidder for materials and/or labor for a portion of the work.
- 1.9 Where the word "Engineer" is used in any of the documents, it shall refer to the Prime Designer of the project, regardless of discipline.

ARTICLE 2 – PRE-BID CONFERENCE

- 2.1 A Pre-Bid Conference shall be held at the time and location described in the Advertisement for Bids. The purpose of the Pre-Bid Conference is to familiarize Bidders with the requirements of the Project and the intent of the Bid Documents, and to receive comments and information from interested Bidders. If the Pre-Bid Conference is stated in the Advertisement for Bids to be a Mandatory Pre-Bid Conference, bids shall be accepted only from those bidders who attend the Pre-Bid Conference. Bidders who are not in attendance for the entire Pre-Bid Conference will be considered to have not attended.
- 2.2 Any revision of the Bid Documents made as a result of the Pre-Bid Conference shall not be valid unless included in an addendum.

ARTICLE 3 – BIDDER'S REPRESENTATION

- 3.1 Each Bidder by making his bid represents that:
 - 3.1.1 He has read and understands the Bid Documents and his bid is made in accordance therewith.
 - 3.1.2 He has had the opportunity to visit the site and has familiarized himself with the local conditions under which the work is to be performed.
 - 3.1.3 His bid is based solely upon the materials, systems, and equipment described in the Bid Documents as advertised and as modified by addenda.
 - 3.1.4 His bid is not based on any verbal instructions contrary to the Bid Documents and addenda.
 - 3.1.5 He is familiar with the Code of Governmental Ethics requirement that prohibits public servants and/or their immediate family members from bidding on or entering into contracts; he is aware that the Designer and its principal owners are considered Public Servants under the Code of Governmental Ethics for the limited purposes and scope of the Design Contract with the State on this Project (see Ethics Board Advisory Opinion, No. 2009-378 and 2010-128); and neither he nor any principal of the Bidder with a controlling interest therein has an immediate family relationship with the Designer or any principal within the Designer's firm. (La. R.S. 42:1113). Any Bidder submitting a bid in violation of this clause shall be disqualified and any Contract entered into in violation of this clause shall be null and void.
- 3.2 The Bidder must be fully qualified under any State or local licensing law for Contractors in effect at the time and at the location of the work before submitting his bid. In the State of Louisiana, Revised Statutes 37:2150, et seq. will be considered, if applicable.

The Contractor shall be responsible for determining that all of his Sub-bidders or prospective Subcontractors are duly licensed in accordance with law.

ARTICLE 4 – BID DOCUMENTS

4.1 Copies

4.1.1 Bid Documents may be obtained from the Lakefront Management Authority as stated in the Advertisement for Bids.

4.1.1.1 One (1) set of Plans and Specifications shall be furnished to each Bidder.

4.1.1.2 In addition to the availability of printed Bid Documents, the Lakefront Management Authority will provide the Bid Documents in electronic format. They may be obtained without charge and without deposit as stated in the Advertisement for Bids.

4.1.1.3 Where electronic distribution is provided, all other plan holders are responsible for their own reproduction costs.

4.1.2 Complete sets of Bid Documents shall be used in preparing bids; neither the Owner nor the Engineer assume any responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bid Documents.

4.1.3 The Owner or Engineer in making copies of the Bid Documents available on the above terms, do so only for the purpose of obtaining bids on the work and do not confer a license or grant for any other use.

4.2 Interpretation or Correction of Bid Documents

4.2.1 The Contract and Bonds which govern the Work shall be performed in accordance with the Plans and Specifications. Items not covered in the provided plans and specifications shall be performed in accordance with the Louisiana Standard Specifications for Roads and Bridges, current edition. The Bidder understands that all quantities for performing the Work have been estimated by the Engineer, and that the Bid shall be the sum of the quantities multiplied by their respective unit rates.

4.2.2 Bidders shall promptly notify the Lakefront Management Authority contact person listed in the Advertisement for Bids of any ambiguity, inconsistency or error which they may discover upon examination of the Bid Documents or of the site and local conditions.

4.2.3 Bidders requiring clarification or interpretation of the Bid Documents shall make a written request to the Lakefront Management Authority contact person listed in the Advertisement for Bids, to reach him at least seven days prior to the date for receipt of bids.

4.2.4 Any interpretation, correction, or change of the Bid Documents will be made by addendum. Interpretations, corrections, or changes of the Bid Documents made in any

other manner will not be binding and Bidders shall not rely upon such interpretations, corrections, and changes.

4.3 Substitutions

- 4.3.1 The materials, products, and equipment described in the Bid Documents establish a standard of required function, dimension, appearance, and quality to be met by any proposed substitution. No substitutions shall be allowed after bids are received.
- 4.3.2 No substitution will be considered unless written request for approval has been submitted by the Proposer and has been received by the Engineer at least seven (7) working days prior to the opening of bids. (La.R.S.38:2295C) Each such request shall include the name of the material or equipment for which it is to be substituted and a complete description of the proposed substitute including model numbers, drawings, cuts, performance and test data and any other information necessary for an evaluation.

A statement setting forth any changes in other materials, equipment or work that incorporation of the substitute would require shall be included. It shall be the responsibility of the proposer to include in his proposal all changes required of the Bid Documents if the proposed product is used. Prior approval is given contingent upon supplier being responsible for any costs which may be necessary to modify the space or facilities needed to accommodate the materials and equipment approved.

- 4.3.3 If the Engineer approves any proposed substitution, such approval will be set forth in an addendum. Bidders shall not rely upon approvals made in any other manner.

4.4 Addenda

- 4.4.1 Addenda will be emailed or delivered to all who are known by the Lakefront Management Authority to have received a complete set of Bid Documents.
- 4.4.2 Copies of addenda will be made available for inspection wherever Bid Documents are on file for that purpose.
- 4.4.3 Except as described herein, addenda shall not be issued within a period of seventy-two (72) hours prior to the advertised time for the opening of bids, excluding Saturdays, Sundays, and any other legal holidays. If the necessity arises of issuing an addendum modifying plans and specifications within the seventy-two (72) hour period prior to the advertised time for the opening of bids, then the opening of bids shall be extended at least seven but no more than twenty-one (21) working days, without the requirement of re- advertising. The Lakefront Management Authority shall be consulted prior to issuance of such an addendum and shall approve such issuance. The revised time and date for the opening of bids shall be stated in the addendum.
- 4.4.4 Each Bidder shall ascertain from the Lakefront Management Authority prior to submitting his bid that he has received all addenda issued, and he shall acknowledge

their receipt on the Bid Form.

- 4.4.5 The Owner shall have the right to extend the bid date by up to (30) thirty days without the requirement of re-advertising. Any such extension shall be made by addendum issued by the Lakefront Management Authority.

ARTICLE 5 – BID PROCEDURE

5.1 Form and Style of Bids

- 5.1.1 Bids shall be submitted on the Louisiana Uniform Public Work Bid Form provided by the Engineer.
- 5.1.2 All blanks on the Bid Form shall be filled in manually in ink or typewritten.
- 5.1.3 Bid sums shall be expressed in both words and figures, and in case of discrepancy between the two, the written words shall govern.
- 5.1.4 Any interlineation, alteration, or erasure must be initialed by the signer of the bid or his authorized representative.
- 5.1.5 Bidders are cautioned to complete all alternates should such be required in the Bid Form. Failure to submit alternate prices will render the bid non-responsive and shall cause its rejection.
- 5.1.6 Bidders are cautioned to complete all unit prices should such be required in the Bid Form. Unit prices represent a price proposal to do a specified quantity and quality of work.
- 5.1.7 Bidders are strongly cautioned to ensure that all blanks on the bid form are completely and accurately filled in.
- 5.1.8 Bidder shall make no additional stipulations on the Bid Form nor qualify his bid in any other manner.
- 5.1.9 The bid shall include the legal name of Bidder and shall be signed by the person or persons legally authorized to bind the Bidder to a Contract.

The authority of the signature of the person submitting the bid shall be deemed sufficient and acceptable under any of the following conditions:

- a) Signature on bid is that of any corporate officer or member of a partnership or partnership in commendam listed on most current annual report on file with Secretary of State.
- b) Signature on bid is that of authorized representative of corporation, partnership, or other legal entity and bid is accompanied by corporate resolution, certification as to the principal, or other documents indicating authority.

- c) Corporation, partnership, or other legal entity has filed in the records of the Secretary of State, an affidavit, resolution or other acknowledged or authentic document indicating the names of all parties authorized to submit bids for public contracts.

The name and license number on the envelope shall be the same as the entity identified on the Bid Form.

- 5.1.10 On any bid in excess of fifty thousand dollars (\$50,000.00), the Contractor shall certify that he is licensed under R.S. 37: 2150-2173 and show his license number on the bid above his signature or his duly authorized representative.

5.2 Bid Security

- 5.2.1 No bid shall be considered or accepted unless the bid is accompanied by bid security in the amount identified in the advertisement for bids.

The bid security shall be in the form of a certified check or cashier's check drawn on a bank insured by the Federal Deposit Insurance Corporation, or a Bid Bond written by a surety company licensed to do business in Louisiana and signed by the surety's agent or attorney-in-fact. The Bid Bond shall be written on the Lakefront Management Authority Bid Bond Form, and the surety for the bond must meet the qualifications stated thereon. The Bid Bond shall include the legal name of the bidder be in favor of the Lakefront Management Authority and shall be accompanied by appropriate power of attorney. The Bid Bond must be signed by both the bidder/principal and the surety in the space provided on the Lakefront Management Authority Bid Bond Form. Failure by the bidder/principal or the surety to sign the bid bond shall result in the rejection of the bid.

Bid security furnished by the Contractor shall guarantee that the Contractor will, if awarded the work according to the terms of his proposal, enter into the Contract and furnish Performance and Payment Bonds as required by these Bid Documents, within ten (10) days after written notice that the instrument is ready for his signature.

Should the Bidder refuse to enter into such Contract or fail to furnish such bonds, the amount of the bid security shall be forfeited to the Owner as liquidated damages, not as penalty.

- 5.2.2 The Owner will have the right to retain the bid security of Bidders until either (a) the Contract has been executed and bonds have been furnished, or (b) the specified time has elapsed so that bids may be withdrawn, or (c) all bids have been rejected.

5.3 Submission of Bids

- 5.3.1 The Bid shall be sealed in an envelope. The bid envelope shall be identified on the outside with the name of the bid, and the name, address, and license number of the Bidder. The envelope shall contain only one bid form and will be received until the

time specified and at the place specified in the Advertisement for Bids. It shall be the specific responsibility of the Bidder to deliver his sealed bid to Lakefront Management Authority at the appointed place and prior to the announced time for the opening of bids. Late delivery of a bid for any reason, including late delivery by United States Mail, or express delivery, shall disqualify the bid.

If the bid is sent by mail, the sealed envelope shall be enclosed in a separate mailing envelope with the notation "Bid Enclosed" on the face thereof. Such bids shall be sent by Registered or Certified Mail or by express delivery, Return Receipt Requested, addressed to:

Lakefront Management Authority
6001 Stars and Stripes Blvd, Suite 219
New Orleans, LA 70126

- 5.3.2 Bids shall be deposited at the designated location prior to the time on the date for receipt of bids indicated in the Advertisement for Bids, or any extension thereof made by addendum. Bids received after the time and date for receipt of bids will be returned unopened.
- 5.3.3 Bidder shall assume full responsibility for timely delivery at location designated for receipt of bids.
- 5.3.4 Oral, telephonic, or telegraphic bids are invalid and shall not receive consideration. Owner shall not consider notations written on outside of bid envelope which have the effect of amending the bid. Written modifications enclosed in the bid envelope, and signed or initialed by the Contractor or his representative, shall be accepted.

5.4 Bidder Requirements

It is the responsibility of each Bidder before submitting a Bid to:

- 5.4.1 Examine the Bidding Documents including the Plans and Specifications and any Addenda or related data identified in the Bidding Documents;
- 5.4.2 Visit the Project Site to become familiar with the local conditions if they are believed to affect cost, progress, or the completion of the Work;
- 5.4.3 Become familiar and satisfied with all federal, state, and local Laws and Regulations that may affect cost, progress, or the completion of the Work;
- 5.4.4 Study and correlate all information known to the Bidder including observations obtained from Bidder's visits, if any, to the Project Site, with the Bidding Documents;
- 5.4.5 Submit a written notice to the Engineer within three (3) days regarding any conflicts, errors, ambiguities, or discrepancies discovered in the Bidding Documents and confirm that the written resolution thereof by the Engineer is acceptable to the Bidder; and

- 5.4.6 Determine that the Bidding Documents are generally sufficient to convey an understanding of all terms and conditions for completing the required Work.

The submission of a Bid will constitute an incontrovertible representation that the Bidder has complied with every requirement of the Bid Documents including all requirements specified in the Advertisement for Bids, the Instruction To Bidders, and the Plans and Specifications.

5.5 Modification or Withdrawal of Bid

- 5.5.1 A bid may not be modified, withdrawn or canceled by the Bidder during the time stipulated in the Advertisement for Bids, for the period following the time and bid date designated for the receipt of bids, and Bidder so agrees in submitting his bid, except in accordance with La. R.S. 38:2214 which states, in part, "Bids containing patently obvious mechanical, clerical or mathematical errors may be withdrawn by the Contractor if clear and convincing sworn, written evidence of such errors is furnished to the public entity within forty eight hours of the Bid Opening excluding Saturdays, Sundays and legal holidays".
- 5.5.2 Prior to the time and date designated for receipt of bids, bids submitted early may be modified or withdrawn only by notice to the party receiving bids at the place and prior to the time designated for receipt of bids.
- 5.5.3 Withdrawn bids may be resubmitted up to the time designated for the receipt of bids provided that they are then fully in conformance with these Instructions to Bidders. No bid can be withdrawn after the hour set for opening such bid except as provided in LSA-R.S. 38:2214C, i.e. bids containing patently obvious, unintentional, and substantial mechanical, clerical, or mathematical errors, or errors of unintentional omission of a substantial quantity of work, labor, material, or services made directly in the compilation of the bid, may be withdrawn by the contractor if clear and convincing sworn, written evidence of such errors is furnished to the Lakefront Management Authority within forty-eight (48) hours of the bid opening excluding Saturdays, Sundays, and legal holidays. Such errors must be clearly shown by objective evidence drawn from inspection of the original work papers, documents, or material used in the preparation of the bid sought to be withdrawn. If the Lakefront Management Authority determines that the error is a patently obvious mechanical, clerical, or mathematical error, or unintentional omission of a substantial quantity of work, labor, material, or service, as opposed to a judgment error, and that the bid was submitted in good faith it shall accept the withdrawal and return the bid security to the contractor. A contractor who attempts to withdraw a bid under these provisions shall not be allowed to resubmit a bid on the project (LSA-R.S.38:2214D).
- 5.5.4 Bid Security shall be in an amount sufficient for the bid as modified or resubmitted.

ARTICLE 6 – CONSIDERATION OF BIDS

6.1 Opening of Bids

- 6.1.1 The properly identified Bids received on time will be opened publicly and will be read aloud, and a tabulation abstract of the amounts of the base bids and alternates, if any, will be made available to Bidders.

6.2 Rejection of Bids

- 6.2.1 The Owner shall have the right to reject any or all bids and in particular to reject a bid not accompanied by any required bid security or data required by the Bid Documents or a bid in any way incomplete or irregular.

6.3 Acceptance of Bid

- 6.3.1 It is the intent of the Owner, if he accepts any alternates, to accept them in the order in which they are listed in the Bid Form. Determination of the Low Bidder shall be on the basis of the sum of the base bid and the alternates accepted. However, the Owner shall reserve the right to accept alternates in any order which does not affect determination of the Low Bidder.

6.4 Notice of Award

- 6.4.1 The Owner, or its designated bidding agent, shall provide written notice to the Successful Bidder stating that the Owner will sign and deliver the Contract upon compliance with the conditions enumerated therein and within the time specified.

ARTICLE 7 – POST-BID INFORMATION

7.1 Submissions

- 7.1.1 The Contractor shall submit all required deliverables in conformance with the Bid Documents.

It is the preference of the Owner that, to the greatest extent possible or practical, the Contractor utilize Louisiana Subcontractors, manufacturers, Suppliers and labor.

- 7.1.2 The Contractor will be required to establish to the satisfaction of the Engineer the reliability and responsibility of the proposed Subcontractors to furnish and perform the work described in the sections of the Specifications pertaining to such proposed Subcontractor's respective trades. The General Contractor shall be responsible for actions or inactions of Subcontractors and/or material suppliers.

The General Contractor is totally responsible for any lost time or extra expense incurred due to a Subcontractor's/or Material Supplier's failure to perform. Failure to perform includes, but is not limited to, a Subcontractor's financial failure,

abandonment of the project, failure to make prompt delivery, or failure to do work up to standard. Under no circumstances shall the Owner be obligated to mitigate the General Contractor's losses or reimburse the General Contractor for losses caused by these events.

- 7.1.3 Subcontractors and other persons and organizations selected by the Bidder must be used on the work for which they were proposed and shall not be changed except with the written approval of the Owner and the Engineer.

In accordance with La. R.S. 38:2227, LA. R.S. 38:2212.10 and LA. R.S. 23:1726(B) each bidder on this project must submit the completed Attestations Affidavit (Past Criminal Convictions of Bidders, Verification of Employees and Certification Regarding Unpaid Workers Compensation Insurance) form found within this bid package. The Attestations Affidavit form shall be submitted to Lakefront Management Authority within 10 days after the opening of bids.

ARTICLE 8

PERFORMANCE AND PAYMENT BOND

8.1 Bond Required

The Contractor shall furnish and pay for a Performance and Payment Bond written by a company licensed to do business in Louisiana, which shall be signed by the surety's agent or attorney-in-fact, in an amount equal to the total contract price as awarded. Surety must be listed currently on the U. S. Department of Treasury Financial Management Service List (Treasury List) as approved for an amount equal to or greater than the Contract amount or must be an insurance company domiciled in Louisiana or owned by Louisiana residents. If surety is qualified other than by listing on the Treasury list, the Contract amount may not exceed fifteen percent of policyholders' surplus as shown by surety's most recent financial statements filed with the Louisiana Department of Insurance and may not exceed the amount of \$500,000. However, a Louisiana domiciled insurance company with at least an A- rating in the latest printing of the A. M. Best's Key Rating Guide shall not be subject to the \$500,000 limitation, provided that the Contract amount does not exceed ten percent of policyholders' surplus as shown in the latest A. M. Best's Key Rating Guide nor fifteen percent of policyholders' surplus as shown by surety's most recent financial statements filed with the Louisiana Department of Insurance. The Bond shall be signed by the surety's agent or attorney-in-fact. The Bond shall be in favor of the Lakefront Management Authority.

8.2 Time of Delivery and Form of Bond

- 8.2.1 The Bidder shall deliver the required bond to the Owner simultaneous with the execution of the Contract.

- 8.2.2 8.2.2 Bond shall be in the form furnished by the Lakefront Management Authority,

entitled CONTRACT BETWEEN OWNER AND CONTRACTOR and PERFORMANCE AND PAYMENT BOND, copies of which are included in the Bid Documents.

8.2.3 8.2.3 The Bidder shall require the Attorney-in-Fact who executes the required bond on behalf of the surety to affix thereto a certified and current copy of his power of Attorney.

8.3 Recordation of Contract and Bond [38:2241A (2)]

8.3.1 The Contractor shall record within thirty (30) days the Contract Between Owner and Contractor, and Performance and Payment Bond with the Clerk of Court in the Parish in which the Work is to be performed. The Contractor shall obtain a Certificate of Recordation from the Clerk of Court and forward this Certificate immediately to the Lakefront Management Authority contact person listed in the Advertisement for Bids. No request for payment will be processed until receipt of the Certificate of Recordation.

ARTICLE 9 – FORM OF CONTRACT BETWEEN OWNER AND CONTRACTOR

9.1 Form to be Used

9.1.1 Form of the Contract to be used shall be furnished by the Lakefront Management Authority, an example of which is bound in the Bid Documents.

9.2 Award

9.2.1 Before award of the Contract, the successful Bidder shall furnish to the Owner a copy of a Disclosure of Ownership Affidavit stamped by the Secretary of State, a certified copy of the minutes of the corporation or partnership meeting which authorized the party executing the bid to sign on behalf of the Contractor.

9.2.2 In accordance with Louisiana Law, when the Contract is awarded, the successful Bidder shall, at the time of the signing of the Contract, execute the Non-Collusion Affidavit included in the Contract Documents

9.2.3 When this project is financed either partially or entirely with State Bonds, the award of this Contract is contingent upon the sale of bonds by the State Bond Commission. The State shall incur no obligation to the Contractor until the Contract between Owner and Contractor is duly executed.

LOUISIANA UNIFORM PUBLIC WORK BID FORM

TO: Lakefront Management Authority
6001 Stars and Stripes Blvd, Suite 219
New Orleans, LA 70126

BID FOR: Orleans Marina Harbormaster
Office Renovations; Project #E104-22-07
221 Lake Marina Avenue; New Orleans LA,

The undersigned bidder hereby declares and represents that she/he; a) has carefully examined and understands the Bidding Documents, b) has not received, relied on, or based his bid on any verbal instructions contrary to the Bidding Documents or any addenda, c) has personally inspected and is familiar with the project site, and hereby proposes to provide all labor, materials, tools, appliances and facilities as required to perform, in a workmanlike manner, all work and services for the construction and completion of the referenced project, all in strict accordance with the Bidding Documents prepared by: **VergesRome Architects; 320 N. Carrollton Ave., Suite 100; New Orleans, LA 70119** and dated: **28 September 2023**.

Lakefront Management Authority and dated: December 2016.

Bidders must acknowledge all addenda. The Bidder acknowledges receipt of the following **ADDENDA:** (Enter the number the Designer has assigned to each of the addenda that the Bidder is acknowledging) _____.

TOTAL BASE BID: For all work required by the Bidding Documents (including any and all unit prices designated "Base Bid" * but not alternates) the sum of:

_____ Dollars (\$ _____)

ALTERNATES: For any and all work required by the Bidding Documents for Alternates including any and all unit prices designated as alternates in the unit price description.

Alternate No. 1 *(Not Applicable)* for the lump sum of:

_____ Dollars (\$ _____)

Alternate No. 2 *(Not Applicable)* for the lump sum of:

_____ Dollars (\$ _____)

NAME OF BIDDER: _____

ADDRESS OF BIDDER: _____

LOUISIANA CONTRACTOR'S LICENSE NUMBER: _____

NAME OF AUTHORIZED SIGNATORY OF BIDDER: _____

TITLE OF AUTHORIZED SIGNATORY OF BIDDER: _____

SIGNATURE OF AUTHORIZED SIGNATORY OF BIDDER **: _____

DATE: _____

* The Unit Price Form shall be used if the contract includes unit prices. Otherwise it is not required and need not be included with the form. The number of unit prices that may be included is not limited and additional sheets may be included if needed.

** If someone other than a corporate officer signs for the Bidder/Contractor, a copy of a corporate resolution or other signature authorization shall be required for submission of bid. Failure to include a copy of the appropriate signature authorization, if required, may result in the rejection of the bid unless bidder has complied with La. R.S. 38:2212(A)(1)(c) or RS 38:2212(O).

BID SECURITY in the form of a bid bond, certified check or cashier's check as prescribed by LA RS 38:2218.A is attached to and made a part of this bid.

LOUISIANA UNIFORM PUBLIC WORK BID FORM UNIT PRICE FORM

TO: Lakefront Management Authority
 6001 Stars and Stripes Blvd, Suite 219
 New Orleans, LA 70126

BID FOR: Orleans Marina Harbormaster – Office Renovations
 Project # E04-22-07
 221 Lake Marina Avenue
 New Orleans, LA 70134

UNIT PRICES: This form shall be used for any and all work required by the Bidding Documents and described as unit prices. Amounts shall be stated in figures and only in figures.

DESCRIPTION: <input checked="" type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

DESCRIPTION: <input type="checkbox"/> Base Bid or <input type="checkbox"/> Alt.# <u>NOT APPLICABLE</u>			
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE EXTENSION (Quantity times Unit Price)
NA	NA	NA	NA

All quantities are estimated. The contractor will be paid upon actual quantities as verified by owner.

**BID BOND
FOR
LAKEFRONT MANAGEMENT AUTHORITY PROJECTS**

Date: _____

KNOW ALL MEN BY THESE PRESENTS:

That _____ of _____, as Principal, and _____, as Surety, are held and firmly bound unto the Lakefront Management Authority (Obligee), in the full and just sum of _____, lawful money of the United States, for payment of which sum, well and truly be made, we bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally firmly by these presents.

Surety represents that it is listed on the current U. S. Department of the Treasury Financial Management Service list of approved bonding companies as approved for an amount equal to or greater than the amount for which it obligates itself in this instrument or that it is a Louisiana domiciled insurance company with at least an A – rating in the latest printing of the A. M. Best’s Key Rating Guide. If surety qualifies by virtue of its Best’s listing, the Bond amount may not exceed ten percent of policyholders’ surplus as shown in the latest A. M. Best’s Key Rating Guide.

Surety further represents that it is licensed to do business in the State of Louisiana and that this Bond is signed by surety’s agent or attorney-in-fact. This Bid Bond is accompanied by appropriate power of attorney.

THE CONDITION OF THIS OBLIGATION IS SUCH that, whereas said Principal is herewith submitting its proposal to the Obligee on a Contract for:

CONTRACT/PROJECT NAME for the LMA

NOW, THEREFORE, if the said Contract be awarded to the Principal and the Principal shall, within such time as may be specified, enter into the Contract in writing and give a good and sufficient bond to secure the performance of the terms and conditions of the Contract with surety acceptable to the Obligee, then this obligation shall be void; otherwise this obligation shall become due and payable.

PRINCIPAL (BIDDER)

SURETY

BY: _____
AUTHORIZED OFFICER-OWNER-PARTNER
OR ATTORNEY-IN-FACT (SEAL)

BY: _____
AGENT

CONTRACT/PROJECT NAME

Orleans Marina Harbormaster Office Renovations

STATE OF LOUISIANA

PARISH OF ORLEANS

ATTESTATIONS AFFIDAVIT

Before me, the undersigned notary public, duly commissioned and qualified in and for the parish and state aforesaid, personally came and appeared Affiant, who after being duly sworn, attested as follows:

LA. R.S. 38:2227 PAST CRIMINAL CONVICTIONS OF BIDDERS

A. No sole proprietor or individual partner, incorporator, director, manager, officer, organizer, or member who has a minimum of a ten percent (10%) ownership in the bidding entity named below has been convicted of, or has entered a plea of guilty or nolo contendere to any of the following state crimes or equivalent federal crimes:

- (a) Public bribery (R.S. 14:118)
- (b) Corrupt influencing (R.S. 14:120)

- (c) Extortion (R.S. 14:66)
- (d) Money laundering (R.S. 14:23)

B. Within the past five years from the project bid date, no sole proprietor or individual partner, incorporator, director, manager, officer, organizer, or member who has a minimum of a ten percent (10%) ownership in the bidding entity named below has been convicted of, or has entered a plea of guilty or nolo contendere to any of the following state crimes or equivalent federal crimes, during the solicitation or execution of a Contract or bid awarded pursuant to the provisions of Chapter 10 of Title 38 of the Louisiana Revised Statutes:

- (a) Theft (R.S. 14:67)
- (b) Identity Theft (R.S. 14:67.16)
- (c) Theft of a business record of (R.S.14:67.20)
- (d) False accounting (R.S. 14:70)
- (e) Issuing worthless checks (R.S. 14:71)

- (f) Bank fraud (R.S. 14:71.1)
- (g) Forgery (R.S. 14:72)
- (h) Contractors; misapplication payments (R.S. 14:202)
- (i) Malfeasance in office (R.S. 14:134)

LA. R.S. 38:2212.10 Verification of Employees

- A. At the time of bidding, Appearer is registered and participates in a status verification system to verify that all new hires in the state of Louisiana are legal citizens of the United States or are legal aliens.
- B. If awarded the Contract, Appearer shall continue, during the term of the Contract, to utilize a status verification system to verify the legal status of all new employees in the state of Louisiana.
- C. If awarded the Contract, Appearer shall require all Subcontractors to submit to it a sworn affidavit verifying compliance with Paragraphs (A) and (B) of this Subsection.

CONTRACT/PROJECT NAME
Name of Project

LA. R.S. 23:1726(B) Certification Regarding Unpaid Workers Compensation Insurance

- A. R.S. 23:1726 prohibits any entity against whom an assessment under Part X of Chapter 11 of Title 23 of the Louisiana Revised Statutes of 1950 (Alternative Collection Procedures & Assessments) is in effect, and whose right to appeal that assessment is exhausted, from submitting a bid or proposal for or obtaining any Contract pursuant to Chapter 10 of Title 38 of the Louisiana Revised Statutes of 1950 and Chapters 16 and 17 of Title 39 of the Louisiana Revised Statutes of 1950.
- B. By signing this bid /proposal, Affiant certifies that no such assessment is in effect against the bidding / proposing entity.

NAME OF BIDDER

NAME OF AUTHORIZED SIGNATORY OF BIDDER

DATE

TITLE OF AUTHORIZED SIGNATORY OF BIDDER

SIGNATURE OF AUTHORIZED
SIGNATORY OF BIDDER/AFFIANT

Sworn to and subscribed before me by Affiant on the _____ day of _____, 20__.

Notary Public

CONTRACT BETWEEN OWNER AND CONTRACTOR

BEFORE the undersigned, a Notary Public, duly commissioned and qualified, and in the presence of the witnesses hereinafter named and undersigned,

PERSONALLY CAME AND APPEARED:

The Lakefront Management Authority (“Management Authority” or “Owner”), a political subdivision of the State of Louisiana and the governing authority of the non-flood protection assets of the Orleans Levee District (“District”), with its office located at 6001 Stars and Stripes Boulevard, New Orleans Lakefront, Terminal Building, Suite 219, New Orleans, Louisiana 70126, appearing through its Executive Director, Louis J Capo, duly authorized by a Resolution adopted by the Management Authority, and,

_____ (“Contractor”), a Louisiana _____, with its registered office located at _____, appearing through its sole member and manager, _____;

who declared, that for and in consideration of the payment, hereinafter provided for, to be made by the Management Authority, Contractor agrees and is obligated to furnish all labor, equipment, supplies, materials, and to perform all work necessary for the _____ (the “project”), and all other work required under and in accordance with the Bid by Contractor dated on _____, Contract Documents and Specifications prepared by _____, dated on _____, Project No. _____, and Addenda _____, copies of which are incorporated and made a part hereof (the “work”), for the total price and sum of \$ _____ (the “Contract Sum”). The Contractor represents that its federal taxpayer identification number is _____.

It is recognized by the parties herein that the Contract Documents, including by way of example and not of limitation, the Plans, Specifications (including General Provisions, Special Provisions, and Technical Specifications), any Addenda thereto, Instructions to Bidders, this Contract, Advertisement For Bids, Affidavits, Bid Form, Bonds (Bid, Performance, and Payment), any Submitted Post-Bid Documentation, Notice of Award, Notice to Proceed, and Change Orders, if any, impose duties and obligations upon the parties herein, and the parties thereby agree that they shall be bound by said duties and obligations. For these purposes, all of the provisions contained in the aforementioned Contract Documents are incorporated herein by reference with the same force and effect as though said Contract Documents were herein set out in full.

Time for Completion: The work shall be commenced on a date to be specified in a written order of the Owner (Notice to Proceed) and shall be completed within _____ consecutive calendar days from and after the commencement date (the “Contract Time”).

Liquidated Damages: For each day the Work remains incomplete beyond the Contract Time, or Extension of Contract Time the sum of _____ dollars (\$ _____) per calendar day will be deducted from any money due to the Contractor as liquidated damages. The Contractor and Surety shall be liable for any liquidated damages that are in excess of the amount due under this Contract to the Contractor.

The Contractor and Owner waive claims against each other for consequential damages arising out

of or relating to this Contract. This mutual waiver includes damages incurred by the Contractor for principal office expenses, including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit except anticipated profit arising directly from the work.

This Contract shall be governed under and by the laws of the State of Louisiana. Further, the parties acknowledge that this Contract has been entered into pursuant to the Louisiana Public Bid Law, La.Rev.Stat. 38:§2211, et seq. and agree that all terms and conditions required under the Louisiana Bid Law are incorporated herein as if written in their entirety.

The provisions of this Contract shall be enforced, and venue and jurisdiction of any suit, right or cause of action arising under or in connection with this Contract shall be in the Civil District Court for the Parish of Orleans, State of Louisiana.

In the event of litigation between the parties concerning this Contract, the parties agree that the prevailing party in any such litigation shall be entitled to recover reasonable attorney's fees, expenses and costs against the non-prevailing party.

The Contractor warrants that it has not employed or retained any company or person, other than a bona fide employee working solely for the Contractor, to solicit or secure this Contract, and that they have not paid or agreed to pay any company or person, other than a bona fide employee working solely for the Contractor, any fee, commission, percentage, brokerage fee, gifts, or any other consideration, contingent upon or resulting from the award or making of this Contract. For breach or violation of this warranty, the Owner shall have the right to terminate this Contract without notice or liability, and, in its discretion, deduct from the Contract price or consideration, or otherwise recover, the full amount of such fee, commission, percentage, brokerage fee, gift or contingent fee.

This Contract shall not be transferred or assigned by the Contractor without the prior written consent of the Owner.

This Contract constitutes the entire Contract between the Owner and the Contractor and supersedes all prior written or oral understandings. This Contract may only be amended, supplemented, modified or cancelled by a duly written instrument executed by the parties.

All notices required to be given under the Contract Documents shall be in writing and either personally served by hand delivery, sent by United States mail, sufficient postage prepaid, certified mail return receipt requested, or sent by a nationally recognized overnight commercial delivery service, and addressed to the parties at the addresses set forth above in this Contract, and shall be deemed to be given on the day that such Notice is received by the Party to whom it is sent. If notice is sent by Certified Mail and it is refused by the recipient and returned to the Post Office, notice shall be deemed to have been given on the date the recipient rejected the notice by Certified Mail.

Neither the form nor any language of this Contract shall be interpreted or construed in favor of or against either party hereto.

Nothing herein shall be construed as creating any personal liability on the part of any commissioner, public official, or officer or member of the public body which is a party to this Contract, or any of their representatives, agents, staff members, personnel or employees.

If any term or provision of this Contract, or of any of the Contract Documents, or the

application thereof to any person or circumstances, shall to any extent be invalid or unenforceable, the remainder of this Contract shall not be affected thereby, and each term and provision of this Contract shall be valid and be enforced to the fullest extent permitted by law.

The services contracted for are of such a nature, and the size of the contract, is such that Contractor's performance hereunder does not significantly impact Contractor's operations. Should the Contractor be adjudicated a bankrupt or there be the appointment of a Receiver for Contractor, or the filing of a bankruptcy, receivership or respite petition by the Contractor or upon Contractor's suspension, failure or insolvency, in such event, ipso facto, this Contract shall terminate, without any further notice to Contractor and without the Management Authority taking any further action.

The Contract Documents identified herewith, and made part hereof, have been paragraphed "NE VARIETUR" by the undersigned Notary for identification herewith. The parties hereto relieve and release the Notary from any and all liability in connection to the terms of the Contract.

This Contract shall inure to the benefit of and be binding upon the parties and their respective successors and assigns.

THUS DONE AND PASSED, in multiple originals, on the ____ day of _____, 20____, in the presence of the undersigned competent witnesses, who signed their names with said appearer and me, Notary, after reading of the whole.

WITNESSES:

OWNER:

**LAKEFRONT MANAGEMENT
AUTHORITY**

BY: _____
LOUIS J. CAPO
EXECUTIVE DIRECTOR

CONTRACTOR:

Contractor (Name)

BY: _____
DULY AUTHORIZED INDIVIDUAL

STATE OF LOUISIANA

PARISH OF ORLEANS

On this ____ day of _____, 20____, before me, the undersigned authority, personally came and appeared:

_____ who declared and acknowledged to me that he executed the foregoing Contract and signed same for the purposes and object therein expressed, acting in the capacity of _____ for _____.

(Signature)

**SWORN TO AND SUBSCRIBED
BEFORE ME, THIS ____ DAY
OF _____, 20____.**

NOTARY PUBLIC

STATE OF LOUISIANA

PARISH OF ORLEANS

On this ____ day of _____, 20____, before me, the undersigned authority, personally came and appeared:

_____ who declared and acknowledged to me that he executed the foregoing Contract and signed same for the purposes and object therein expressed, acting in the capacity of _____ for _____.

(Signature)

**SWORN TO AND SUBSCRIBED
BEFORE ME, THIS ____ DAY
OF _____, 20____.**

NOTARY PUBLIC

Performance and Payment Bond:

To these presents personally came and intervened _____, herein acting for _____, a corporation, and duly authorized to transact business in the State of Louisiana, as surety, who declared that having taken cognizance of this Contract and of the Construction Documents mentioned herein, he hereby in his capacity as its Attorney in Fact obligates his said company, as Surety for the said Contractor, unto the said Owner, up to the sum of _____ Dollars(\$). By issuance of this bond, the surety acknowledges they are in compliance with La. R.S. 38:2219.

The condition of this performance and payment bond shall be that should the Contractor herein not perform the Contract in accordance with the terms and conditions hereof, or should said Contractor not fully indemnify and save harmless the Owner, from all cost and damages which he may suffer by said Contractor's non-performance or should said Contractor not pay all persons who have and fulfill obligations to perform labor and/or furnish materials in the prosecution of the work provided for herein, including by way of example workmen, laborers, mechanics, and furnishers of materials, machinery, equipment and fixtures, then said Surety agrees and is bound to so perform the Contract and make said payment(s).

Provided, that any alterations which may be made in the terms of the Contract or in the work to be done under it, or the giving by the Owner of any extensions of time for the performance of the Contract, or any other forbearance on the part of either the Owner or the Contractor to the other shall not in any way release the Contractor or the Surety from their liability hereunder, notice to the Surety of any such alterations, extensions or other forbearance being hereby waived.

The Contractor agrees to abide by the requirements of the following as applicable: Title VI and VII of the Civil Rights Act of 1964, as amended by the Equal Opportunity Act of 1972, Federal Executive Order 11246, the Federal Rehabilitation Act of 1973, as amended, the Vietnam Era Veteran's Readjustment Assistance Act of 1974, Title IX of the Education Amendments of 1972, the Age Act of 1972, and Contractor agrees to abide by the requirements of the Americans with Disabilities Act of 1990.

Contractor agrees not to discriminate in its employment practices, and will render services under this Contract without regard to race, color, sex, religion, national origin, genetic information, age, or disabilities. Any act of discrimination committed by Contractor or failure to comply with these statutory obligations when applicable shall be grounds for termination of this Contract.

In Witness whereof, the parties hereto on the day and year first above written have executed this Contract in eight (8) counterparts, each of which shall, without proof or accountancy for the other counterparts, be deemed an original thereof.

WITNESSES:

**LAKEFRONT MANAGEMENT
AUTHORITY**

BY: _____

Louis J. Capo, Executive Director

BY: _____

SURETY: _____

BY: _____

ATTORNEY IN FACT

ADDRESS

TELEPHONE NUMBER

STATE OF LOUISIANA

PROJECT NO. E04-22-07

NAME: Orleans Marina Harbormaster Office Renovations

PARISH OF ORLEANS

LOCATION: Orleans Parish, Louisiana

A F F I D A V I T

Before me, the undersigned authority, duly commissioned and qualified within and for the State and Parish aforesaid, personally came and appeared _____ representing who, being by me first duly sworn deposed and said that he has read this affidavit and does hereby agree under oath to comply with all provisions herein as follows:

PART I.

Section 2224 of Part II of Chapter 10 of Title 38 of the Louisiana Revised Statutes, as amended.

(1) That affiant employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public Contract under which he received payment, other than persons regularly employed by the affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public Contract were in the regular course of their duties for affiant; and

(2) That no part of the Contract price received by affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the Contract, other than the payment of their normal compensation to persons regularly employed by the affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for affiant.

PART II.

Section 2190 of Part I of Chapter 10 of Title 38 of the Louisiana Revised Statutes, as amended.

That affiant, if an architect or engineer, or representative thereof, does not own a substantial financial interest, either directly or indirectly, in any corporation, firm, partnership, or other organization which supplies materials for the construction of a public work when the architect or engineer has performed architectural or engineering services, either directly or indirectly, in connection with the public work for which the materials are being supplied.

For the purposes of this Section, a "substantial financial interest" shall exclude any interest in stock being traded on the American Stock Exchange or the New York Stock Exchange.

That affiant, if subject to the provisions of this section, does hereby agree to be subject to the penalties involved for the violation of this section.

AFFIANT

SWORN TO AND SUBSCRIBED BEFORE ME THIS _____ DAY OF _____, 20__.

NOTARY

PART II - GENERAL PROVISIONS

GP-1 DEFINITION OF TERMS

Whenever used in the Bidding Requirements or Contract Documents and printed with initial capital letters, the terms listed below will have the meanings indicated which are applicable to the singular or plural thereof. In addition to terms specifically defined, terms with initial capital letters in the Contract Documents include references to identified articles and paragraphs and the titles of other documents or forms.

Unless stated otherwise in the Contract Documents, words or phrases which have a well-known technical or construction industry or trade meaning are used in the Contract Documents in accordance with such recognized meaning.

- a. Acceptance: A written approval from the Authority Representative which certifies that specific items of work in the Contract have been completed and/or obligations have been fulfilled by the Contractor.
- b. Addenda: Those written or graphic documents which are issued prior to opening of Bids in accordance with the Bidding Requirements and clarify or change the bidding requirements or the proposed Contract Documents.
- c. Application of Payment: That form which is used by the Contractor to request partial and final payment and is deemed acceptable to the Owner. It shall be accompanied by any supporting documentation required by the Contract Documents.
- d. Authority: The Lakefront Management Authority(LMA)
- e. Authority Representative: On site representative for the Lakefront Management Authority(LMA).
- f. A.S.T.M.: American Society for Testing and Materials.
- g. Bid: An offer or proposal submitted on the prescribed form setting forth the prices for the Work.
- h. Bidder: The person, association of persons, firm, or corporation submitting an offer or proposal for the Work.
- i. Bidding Requirements: The Advertisement for Bids, Instructions to Bidders, Form of Bid Security, if any, and Bid Form with any supplements.
- j. Change Order: A written order which is submitted to the Contractor, signed by the Owner, and authorizes an addition, deletion, or revision in the Work, or an adjustment in the contract price or the contract time issued after the effective date of the Contract.
- k. Claim: A written demand or assertion by Owner or Contractor seeking an adjustment of Contract Price or Contract Times, or both or other relief with respect to the terms of the Contract.
- l. Contract: The written agreement between the Owner and the Contractor which defines

the work to be completed and shall be understood to include all Contract Documents.

- m. Contract Documents: The Contract, all addenda which pertains to the Contract Documents, Bid Documents and specified Attachments accompanying the Bid and any post-bid documentation submitted prior to the Notice of Award, Contractor's Bid when attached as an exhibit to the Agreement, the Bonds (Bid and Performance/Payment), General Provisions, Special Provisions, Technical Specifications, Plans, and all Field or Change Orders issued after the execution of the Agreement. Shop Drawings and other submittals by the Contractor are not Contract Documents.
- n. Contract Price: The moneys payable by the Owner to the Contractor for the Work in accordance with the Contract Documents as stated in the Contract.
- o. Contract Time: The number of calendar days specified in the Contract for completion of the Work, together with any extensions authorized through change orders.
- p. Contractor: The person, association of persons, firm, or corporation entering into the duly awarded Contract.
- q. Contracting Agency: The Lakefront Management Authority(LMA).
- r. Day: When any period of time is referred to in the Contract Documents using days, it will be computed to exclude the first day and include the last day of such period. If the last day of any such period falls on a Saturday, Sunday, or a legal holiday, that day will be omitted from the computation. A calendar day is measured as twenty-four (24) hour period starting at midnight and ending the following midnight.
- s. Design Report: A written report by the Engineer which provides the design methodology for the Work.
- t. Effective Date of the Contract: The date indicated in the Contract on which it becomes effective.
- u. Engineer: The Lakefront Management Authority, or its designee.
- v. Equipment: All machinery, implements, and power-tools, in conjunction with the necessary supplies for the operation, upkeep, maintenance, and all other tools and apparatuses necessary for the proper construction and acceptable completion of the Work.
- w. Extension of Contract: Any extension of time for completion of Work beyond the Contract Time which is granted by the Owner, recommended by the Engineer and approved by the Management Authority in the form of a Change Order.
- x. Federal Sponsor: The federal agency which has been tasked, if applicable, to manage the implementation of the project.
- y. Field Order: A written order issued by the Engineer which requires minor changes in the Work but which does not involve a change in the Contract Price or Contract Time.
- z. Laboratory: The firm, company, or corporation which is used to test materials and is approved for use by the Engineer.

- aa. Laws and Regulations; Laws or Regulations: Any and all applicable laws, rules, regulations, ordinances, codes, and orders of any and all governmental bodies, agencies, authorities, and courts having jurisdiction.
- bb. Materials: Any substance used in the Work to build structures, but does not include material used in false work or other temporary structures not incorporated in the Work.
- cc. Milestone: A principal event specified in the Contract Documents relating to an intermediated completion date or time prior to the Contract Times.
- dd. Notice of Award: A written notice to the successful Bidder stating that the Bid has been accepted by the Owner and that the successful Bidder is required to execute the Contract and furnish the Payment and Performance Bond and Non-Collusion Affidavit.
- ee. Notice to Proceed: The written notice to the Contractor by the Owner which provides the starting date for the Contract Time.
- ff. Owner: The Owner is the Lakefront Management Authority.
- gg. Performance and Payment Bond: The approved form of security furnished by the Contractor and Surety for the faithful performance of the Work, and the payment for all labor, materials, and/or obligations incurred by the Contractor in the prosecution thereof.
- hh. Plans: That part of the Contract Documents prepared or approved by the Engineer which graphically shows the scope, intent, and character of the Work to be completed by the Contractor.
- ii. Project Site: The location where the Work is to be performed as stated in the Contract Documents.
- jj. Resident Project Representative: An authorized representative of the Engineer who is responsible to inspect the Work and materials furnished by the Contractor.
- kk. Right-of-way: That entire area reserved for constructing, maintaining, and protecting the proposed improvement, structures, and appurtenances of the Work.
- ll. Samples: Physical examples of materials, equipment, or workmanship that are representative of some portion of the Work and which establish the standards by which such portions of the Work will be judged.
- mm. Shop Drawings: All drawings, diagrams, illustrations, schedules, and other data or information which are specifically prepared or assembled by or for the Contractor and submitted by the Contractor to illustrate some portion of the Work to be performed.
- nn. Specifications: That part of the Contract Documents consisting of written technical descriptions of materials, equipment, systems, standards, and workmanship as applied to the work to be performed and certain administrative details applicable thereto.
- oo. State: Louisiana.

- pp. Structures: Bridges, plugs, weirs, bulkheads, berms, dams, levees, and other miscellaneous construction encountered during the Work and not otherwise classified herein.
- qq. Subcontractor: Any person, association of persons, firm, or corporation who contracts with the Contractor to perform any part of the project covered by the Contract.
- rr. Submittals: Certificates, samples, shop drawings, and all other project data which are submitted to the Engineer in order to verify that the correct products will be installed on the project.
- ss. Successful Bidder: The lowest responsible Bidder whom the Owner makes an award.
- tt. Special Provisions: That part of the Contract Documents which amends or supplements these General Provisions.
- uu. Surety: The corporate body, licensed to do business in Louisiana, bound with and for the Contractor's primary liability, and engages to be responsible for payment of all obligations pertaining to acceptable performance of the Work contracted.
- vv. Temporary Structures: Any non-permanent structure required while engaged in the prosecution of the Contract.
- ww. Work: All work specified herein or indicated on the Plans.
- xx. Work Plan: A written plan by the Contractor that details how the Work will be provided including layout drawings, projected schedule (Initial Progress Schedule), and a list of labor hours, materials, and equipment.

GP-2 CONTACT INFORMATION

Prior to Bid opening date, the Contractor shall send all questions and requests for clarification or interpretation of the Bid Documents in writing to the attention of the **David Glen Reed**. The address and contact information are as follows:

VergesRome Architects
320 N. Carrollton Ave., Suite 100
New Orleans, LA 70119
(504) 488-7739; david@vergesrome.com & sarah@vergesrome.com.

After execution of the contract between Owner and Contractor, the successful Contractor shall contact the Architect concerning contract documentation or questions. The addresses and contact information for the Engineer is listed as follows:

VergesRome Architects
320 N. Carrollton Ave., Suite 100
New Orleans, LA 70119
(504) 488-7739

The Owner and Engineer shall deliver all written Claims, Notices, Submittals, Plans, and other documents to the Contractor at the address indicated on the Bid.

GP-3 LAWS, REGULATIONS, STANDARDS, SPECIFICATIONS, AND CODES

Bidders are required to become familiar and remain in compliance with all Federal, State, and local laws, ordinances, and regulations and all orders and decrees of bodies or tribunals having any jurisdiction or authority which may affect those employed for the execution of the Work or which may affect the conduct of the Work. The Contractor shall indemnify the Owner and its representatives against any claim or liability arising from all violations of any laws, bylaws, ordinances, codes, regulations, orders, or decrees, whether by the Contractor or by the Contractor's employees. The filing of a bid will be presumptive evidence that the Bidder has complied with this requirement. The Owner will not be responsible for any inaccurate interpretations or conclusions drawn by the Contractor from information and documentation provided by the Owner.

References to standards, specifications, manuals, or codes of any technical society, organization, or association, or to Laws and Regulations, whether such reference be specific or by implication, may not be in effect at the time of opening the Bids (or on the Effective Date of the Contract if there were no Bids), except as may be otherwise specifically stated in the Contract Documents. No provision of any such standard, specification, manual, or code, or any instruction of a supplier shall be effective to change the duties or responsibilities of the Owner or Engineer, or any of their Subcontractors, consultants, agents, or employees from those set forth in the Bid Documents. No such provision shall be effective to assign to the Owner or Engineer, or any of their consultants, agents, or employees any duty or authority to supervise or direct the performance of the Contractor's obligations or any duty or authority to undertake responsibility inconsistent with the provisions of the Contract Documents.

The obligations imposed by these specifications are in addition to and are not to be construed in any way as a limitation of any rights available to the Engineer or Owner which are otherwise imposed by any laws or regulations or other provisions within the Contract Documents.

The Contractor shall abide by laws set forth in the Davis-Bacon Act of 1931 which states that all laborers and mechanics employed by recipients, the recipient's contractors, or subcontractors on this project shall be paid wages at rates no less than those prevailing on projects of a character similar in the locality as determined by the Secretary of Labor in accordance with Subchapter IV of Chapter 31 of Title 40 United States Code. Additionally, with respect to the labor standards specified in this section, the Secretary of Labor shall have the authority and functions set forth in Reorganization Plan Number 14 of 1950 (64 Stat. 1267; 5 U.S.C. App.) and The Copeland Act of Title 40 (40 U.S.C. § 3145). Prevailing Wage Determination Schedules, as determined by the United States Department of Labor, are provided in the Appendix. Prevailing Wage Determination Schedules are subject to modification by the United States Department of Labor. The Contractor is responsible for utilizing the most current Prevailing Wage Determination Schedule. These documents can be downloaded from the following link: <http://www.wdol.gov/dba.aspx#3>. Modifications to Prevailing Wage Determination Schedules shall be effective if received (or posted) no less than 10 days prior to bid opening.

GP-4 INSURANCE AND BONDS

A. Minimum Scope and Limits of Insurance

The Contractor shall purchase and maintain without interruption for the duration of the contract insurance against claims for injuries to persons or damages to property which may arise from or in connection with the performance of the Work hereunder by the Contractor, its agents, representatives, employees or subcontractors. The duration of the contract shall be from the inception of the contract until the date of final payment.

1) Worker’s Compensation & Employer’s Liability

Worker’s Compensation insurance shall be in compliance with the Worker’s Compensation law of the State of Louisiana. Employers Liability is included with a minimum limit of \$500,000 per accident/per disease/per employee. If Work is to be performed over water and involves maritime exposure, applicable LHWCA, Jones Act or other maritime law coverage shall be included and the Employers Liability limit increased to a minimum of \$1,000,000.

A.M. Best’s insurance company rating requirement may be waived for Worker’s compensation coverage only.

2) Commercial General Liability

Commercial General Liability insurance, including Personal and Advertising Injury Liability and Products and Completed Operations Liability, shall have a minimum limit per occurrence based on the project value. The Insurance Services Office (ISO) Commercial General Liability occurrence coverage form CG 00 01 (current form approved for use in Louisiana), or equivalent, is to be used in the policy. Claims-made form is unacceptable.

The aggregate loss limit must apply to each project. ISO form CG 25 03 (current form approved for use in Louisiana), or equivalent, shall also be submitted. The State project number, including part number, and project name shall be included on this endorsement.

COMBINED SINGLE LIMIT (CSL) PER OCCURRENCE

The required minimum combined single limit amount of insurance shall be as provided below:

<u>Initial Contract Amount</u>	<u>Minimum Insurance</u>
Up to \$1,000,000	\$1,000,000
From \$1,000,001 to \$2,000,000	\$2,000,000
Over \$2,000,000	\$5,000,000

3) Automobile and Watercraft Liability

Automobile Liability Insurance and Watercraft Liability Insurance shall have a minimum combined single limit per occurrence of \$1,000,000. ISO form number CA 00 01 (current form approved for use in Louisiana), or equivalent, is to be used in the policy. This insurance shall include third-party bodily injury and property damage liability for owned, hired and non-owned automobiles and/or watercraft. If any non-licensed motor vehicles and/or watercraft are engaged in operations within the terms of the contract on the site of the work to be performed thereunder, such insurance shall cover the use of any such vehicles.

NOTE: If the Contractor does not own automobiles and/or watercraft, and such vehicles are utilized in the execution of the contract, then hired and non-owned coverage is acceptable. If automobiles and/or watercraft are not utilized in the execution of the contract, then automobile and/or watercraft coverage is not required.

4) Excess Umbrella

Excess Umbrella Insurance may be used to meet the minimum requirements for General Liability, Automobile Liability, and Watercraft Liability only.

5) Pollution Liability (required when asbestos or other hazardous material abatement is included in the contract)

Pollution Liability insurance, including gradual release as well as sudden and accidental shall have a minimum limit of not less than \$1,000,000 per claim. A claims-made form will be acceptable. A policy period inception date of no later than the first day of anticipated Work under this contract and an expiration date of no earlier than 30 days after anticipated completion of all Work under the contract shall be provided. There shall be an extended reporting period of at least 24 months, with full reinstatement of limits, from the expiration date of the policy. The policy shall not be cancelled for any reason, except non-payment of premium.

6) Builders Risk Coverage

Contractor shall procure at its expense a Builder's Risk Insurance policy covering the building and other constructions to be constructed under the Contract with coverage for the full value of the building and other constructions at the time of completion, naming the Owner and Orleans Levee District as additional insured.

7) Deductibles and Self-Insured Retentions

Any deductibles or self-insured retentions must be declared to and accepted by the Owner. The Contractor shall be responsible for all deductibles and self-insured retentions.

B. Other Insurance Provisions

1) The policies are to contain, or be endorsed to contain, the following provisions:

- i. Worker's Compensation and Employers Liability Coverage

- ii. The insurer shall agree to waive all rights of subrogation against the Owner and the Orleans Levee District, their commissioners, officers, agents, and employees for losses arising from Work performed by the Contractor for the Owner.

2) General Liability Coverage

- i. The Owner and the Orleans Levee District, and their commissioners, officers, agents, and employees are to be added as additional insureds as respects liability arising out of activities performed by or on behalf of the Contractor; products and completed operations of the Contractor, premises owned, occupied or used by the Contractor. ISO Form CG 20 10 (current form approved for use in Louisiana), or equivalent, is to be used;
- ii. The Contractor's insurance shall be primary as respects the Owner and the Orleans Levee District, and their commissioners, officers, agents, and employees. The coverage shall contain no special limitations on the scope of protection afforded to the Owner and the Orleans Levee District, and their commissioners, officers, agents, and employees. Any insurance or self-insurance maintained by the Owner shall be excess and non-contributory of the Contractor's insurance;
- iii. The Contractor's insurance shall apply separately to each insured against whom claim is made or suit is brought, except with respect to the policy limits.

3) All Coverages

- i. Coverage shall not be canceled, suspended, or voided by either party (the Contractor or the insurer) or reduced in coverage or in limits except after 30 days written notice has been given to the Owner. Ten-day written notice of cancellation is acceptable for non-payment of premium. Notifications shall comply with the standard cancellation provisions in the Contractor's policy;
- ii. Neither the acceptance of the completed Work nor the payment thereof shall release the Contractor from the obligations of the insurance requirements or indemnification agreement;
- iii. The insurance companies issuing the policies shall have no recourse against the Owner for payment of premiums or for assessments under any form of the policies;
- iv. Any failure of the Contractor to comply with reporting provisions of the

policy shall not affect coverage provided to the Owner, its officers, agents, employees and volunteers.

4) Acceptability of Insurers

All required insurance shall be provided by a company or companies lawfully authorized to do business in the jurisdiction in which the Project is located. Insurance shall be placed with insurers with an A.M. Best's rating of A-:VI or higher. This rating requirement may be waived for Worker's compensation coverage only.

If at any time an insurer issuing any such policy does not meet the minimum A.M. Best rating, the Contractor shall obtain a policy with an insurer that meets the A.M. Best rating and shall submit another certificate of insurance as required in the contract.

C. Verification of Coverage

Contractor shall furnish the Owner with Certificates of Insurance reflecting proof of required coverage. The Certificates for each insurance policy are to be signed by a person authorized by that insurer to bind coverage on its behalf. The Certificates are to be received and approved by the Owner before Work commences and upon any contract renewal thereafter. The Certificate Holder must be listed as follows:

Lakefront Management Authority (LMA)
6001 Stars and Stripes Blvd, Suite 219
New Orleans, LA 70126
Attn: **Project: E04-22-07**

In addition to the Certificates, Contractor shall submit the declarations page and the cancellation provision endorsement for each insurance policy. The Owner reserves the right to request complete certified copies of all required insurance policies at any time.

Upon failure of the Contractor to furnish, deliver and maintain such insurance as above provided, this contract, at the election of the Owner, may be suspended, discontinued or terminated. Failure of the Contractor to purchase and/or maintain any required insurance shall not relieve the Contractor from any liability or indemnification under the contract.

If the Contractor does not meet the insurance requirements at policy renewal, at the option of the Owner, payment to the Contractor may be withheld until the requirements have been met, OR the Owner may pay the renewal premium and withhold such payment from any monies due the Contractor, OR the contract may be suspended or terminated for cause.

D. Subcontractors

Contractor shall include all subcontractors as insureds under its policies OR shall be responsible for verifying and maintaining the certificates provided by each subcontractor. Subcontractors shall be subject to all of the requirements stated herein. The Owner reserves the right to request copies of subcontractor's certificates at any time.

If Contractor does not verify subcontractors' insurance as described above, Owner has the right to withhold payments to the Contractor until the requirements have been met.

E. Worker's Compensation Indemnity

In the event Contractor is not required to provide or elects not to provide Worker's compensation coverage, the parties hereby agree the Contractor, its Owners, agents and employees will have no cause of action against, and will not assert a claim against, the Owner, its agents and employees as an employer, whether pursuant to the Louisiana Worker's Compensation Act or otherwise, under any circumstance. The parties also hereby agree that the Owner, its agents and employees shall in no circumstance be, or considered as, the employer or statutory employer of Contractor, its Owners, agents and employees. The parties further agree that Contractor is a wholly independent Contractor and is exclusively responsible for its employees, Owners, and agents. Contractor hereby agrees to protect, defend, indemnify and hold the Owner, agents and employees harmless from any such assertion or claim that may arise from the performance of this contract.

F. Indemnification/Hold Harmless Agreement

The Contractor shall indemnify and save harmless the Owner and the Orleans Levee District and their commissioners, officers, employees, or agents against any and all claims, losses, liabilities, demands, suits, causes of action, damages, and judgments of sums of money to any person for loss of life or injury or damage to property growing out of, resulting from, or by reason of, any negligent act or omission, operation or work of the Contractor, its agents, servants, or employees, while engaged upon or in connection with the Services required or performed by the Contractor under this contract. The obligation of the Contractor to defend the Owner and the Orleans Levee District shall arise upon notice of any such claim to Owner or the Orleans Levee District. The obligations under this provision of this Contract shall survive the expiration or earlier termination of this Contract.

Contractor agrees to investigate, handle, respond to, provide defense for and defend any such claims, demands, suits or causes of action at its sole expense and agrees to bear all other costs and expenses related thereto, even if the claims, demands, suits, or causes of action are groundless, false or fraudulent.

GP-5 NOTICE TO PROCEED AND CONTRACT TIME

The Contractor shall begin the Contract Time upon receipt of the Notice to Proceed and start the Work within thirty (30) calendar days after receipt of the Notice to Proceed from the Owner. The Work shall be conducted using sufficient labor, materials, and equipment as necessary to ensure completion within the Contract Time. The Contract Time for completion of the Base Bid for the Work is provided in the Instructions to Bidders, unless an extension is granted to the Contract Time as specified in GP-45. If the Bid contains an Alternate Bid(s), and the Alternate Bid(s) is awarded and included in the Contract, the Contract Time associated with the Alternate Bid(s) will be as provided in the Special Provisions.

GP-6 WORK PLAN

The Contractor shall develop a written Work Plan which accounts for all of the construction activities required by the Contract Documents. The Work Plan shall include a list of the individual construction tasks to be completed and the estimated dates for beginning and completing the tasks. It shall also include all other items which are applicable to completing the Work such as, but not limited to, the following:

- a. Typical report form for the Bi-Weekly Progress Meeting;
- b. Typical form for Daily Progress Report;
- c. Hurricane and Severe Storm Plan;
- d. Site-specific Health and Safety Plan;
- e. The delivery method and source(s) of all construction materials (company or producer name, mailing and physical address, phone number, and name of contact person).
- f. The personnel, material, subcontractors, fabricators, suppliers, types of equipment, and equipment staging areas the Contractor proposes to use for construction;
- g. Shop drawings, test results, and sample submittals;
- h. Survey layout and stakeout;
- i. All supplemental items specified in the Special Provisions.

The Work Plan shall be submitted to the Engineer prior to the Pre-Construction Conference by the date provided in the Special Provisions. The Engineer shall review the Work Plan and have the Contractor make any necessary revisions prior to acceptance of the plan.

GP-7 PROGRESS SCHEDULE

The Contractor shall develop a written Progress Schedule which provides for an orderly progression of the Work, submittals, tests, and deliveries in order to complete the Work within the specified Milestones and Contract Time. All of the items listed in the Work Plan shall be integrated into the Progress Schedule. The format of the schedule shall be composed using Microsoft Project®, or any other software deemed acceptable by the Engineer. It shall be updated weekly by the Contractor, at a minimum. The Progress Schedule shall also include, but not be limited to the following:

- a. All of the elements in the Work Plan, including updates;
- b. A work order issued from Louisiana One Call ordering all their subscribers in the project area to mark their utilities;
- c. A telephone log verifying that all property owners and utilities have been contacted. This log should list the time, date, and names of the personnel representing the property owners, utilities, and Contractor;

The following table defines the monthly anticipated adverse weather days that are expected to occur during the Contract Time and will constitute the baseline monthly weather time for evaluations. The schedule is based upon National Oceanic and Atmospheric Administration (NOAA) or similar data for the regional geographic area.

Monthly Anticipated Adverse Weather Calendar Days											
Jan.	Feb.	Mar.	Apr.	May	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
13	8	9	5	6	9	9	8	7	3	6	11

The Progress schedule must reflect these anticipated adverse weather delays on all-weather dependent activities. Adverse weather days must prevent Work for fifty percent (50%) or more of the work day and delay work critical to the timely completion of the project. The number of actual adverse weather days shall be calculated chronologically from the first to the last day of each month.

The Progress Schedule shall be submitted to the Engineer prior to the Pre-Construction Conference by the date provided in the Special Provisions. The Engineer shall perform a review and have the Contractor make necessary any necessary revisions prior to acceptance of the schedule. Acceptance will not impose responsibility on the Owner or Engineer for the sequencing, scheduling, or progression of the Work. The Contractor is fully responsible for progression of the Work in order to maintain the compliance with the Progress Schedule.

GP-8 DAILY PROGRESS REPORTS

The Contractor shall record the following daily information on Daily Progress Reports:

- a. Date and signature of the author of the report;
- b. Dollar amount of all bid items that are fabricated, installed, backfilled, pumped, constructed, damaged, replaced, etc. The amount of material shall be expressed in the units stated in the bid;
- c. Field notes of all surveys;
- d. Notes on all inspections;
- e. Details of Health and Safety meetings;
- f. A brief description of any Change Orders, Field Orders, Claims, Clarifications, or Amendments;
- g. Weather conditions (adverse weather day, wind speed and direction, temperature, wave height, precipitation, etc.);
- h. The amount of time lost to severe weather or personnel injury, etc;
- i. Notes regarding compliance with the Progress Schedule;
- j. Visitor log including Name, organization affiliation, contact number and email.

The daily progress reports shall be submitted to the Engineer at the Bi-Weekly Progress Meetings specified in GP-13 in both hard copy and digital format (Adobe Acrobat® Format, or approved equal). The typical form for Daily Progress Reports shall be developed by the Contractor and incorporated into the Work Plan.

GP-9 HURRICANE AND SEVERE STORM PLAN

11.1 Hurricane and Severe Storm Plan

Hurricane season extends from 1 June to 30 November. The Contractor shall develop and maintain a written Hurricane and Severe Storm Plan. The Plan shall include, but not be limited to, the following:

- a. What type of actions will be taken before storm strikes at the Project Site. The plan should specify what weather conditions will require shutdown of the Work and removal of equipment, personnel, etc.
- b. Notes from continuous monitoring of NOAA marine weather broadcasts and other local commercial weather forecasts.
- c. Equipment list with details on their ability to handle adverse weather. The time each phase of the plan will be put in effect. The time shall be the number of hours remaining for the storm to reach the worksite if it continues at the predicted speed and direction.
- d. The estimated time necessary to secure and evacuate the site including any emergency flood protection.
- e. Methods which will be used to secure equipment left onsite during adverse weather conditions.
- f. Evacuation or immediate reaction plans to be taken by personnel for sudden storm occurrences.
- g. Communications protocol with local law enforcement and fire and rescue agencies.

The Contractor shall incorporate the Hurricane and Severe Storm Plan into the Work Plan. The Owner and Engineer are not responsible for the adequacy of this plan.

GP-10 HEALTH AND SAFETY PLAN AND INSPECTIONS

The Contractor shall develop and maintain a written Health and Safety Plan which allows the Work to be performed in compliance with all applicable laws, ordinances, rules, and regulations of any government agency having jurisdiction over the safety of personnel or property. This includes maintaining compliance with the Code of Federal Regulations, Title 29, Occupational Safety and Health Administration (OSHA) and all applicable Health and Safety Provisions of the State of Louisiana.

The Contractor shall institute a daily inspection program to assure that the requirements of the Health and Safety Plan are being fulfilled. Inspections shall include the nature of deficiencies observed, corrective action taken or to be taken, location of inspection, date, and signature of the person responsible for its contents. The results of the inspections shall be recorded on Daily Progress Reports and kept at the Project Site during the Work.

The Contractor shall incorporate the Health and Safety Plan into the Work Plan. The Owner and Engineer are not responsible for the adequacy of this plan.

GP-11 PROGRESS MEETINGS AND REPORTS

The Engineer shall schedule meetings to review the progress of the Work, coordinate future efforts, discuss compliance with the Progress Schedule and resolve miscellaneous problems. The Engineer or Resident Project Representative, Contractor, and all Subcontractors actively working at the Project Site shall attend each meeting. Representatives of suppliers, manufacturers, and other Subcontractors may also attend at the discretion of the Contractor. The Contractor shall record the details of each meeting in a Progress Report. The format of this report shall be developed by the Contractor, approved by the Engineer, and included in the Work Plan. The progress meetings and reports shall be scheduled according to the Special Provisions.

GP-12 PRE-CONSTRUCTION CONFERENCE

A Pre-Construction Conference shall be held by the Contractor, Owner, Engineer, local stakeholders, and other appropriate personnel prior to starting construction on a date specified by the owner following the Award of the contract. This conference shall serve to establish a mutual understanding of the Work to be performed, the elements of the Progress Schedule and Work Plan, expectations for bi-weekly progress meetings, the Plans and Specifications, processing Applications for Payment, and any other items of concern. If any subcontractors are not present, another pre-construction conference will be required.

GP-13 CONTRACT INTENT

The Bid Documents are complementary; what is called for by one is as binding as if called for by all. Clarifications and interpretations or notifications of minor variations and deviations of the Contract Documents will be issued by Engineer as provided in these Specifications. Any labor, documentation, services, materials, or equipment that may reasonably be inferred from the Bid Documents or from prevailing custom or trade usage as being required to produce the intended result will be provided at no additional cost to the Owner.

GP-14 ENGINEER AND AUTHORITY OF ENGINEER

The Engineer will be the designated representative of the Owner, the initial interpreter of the Contract Documents and the judge over acceptability of all the Work. Claims, disputes, and other matters relating to the acceptability of the Work, performance by the Contractor or the interpretation of the requirements of the Contract Documents must be submitted to the Engineer in writing. Upon written request from the Contractor, the Engineer shall issue written clarifications or interpretations which are consistent with the overall intent of the Contract Documents. Such written clarifications and interpretations will be binding on the Owner and the Contractor. Either the Owner or the Contractor may make a Claim if a written clarification or interpretation justifies an adjustment in the Contract Price or Contract Times.

The Engineer has the authority to suspend the Work in whole or in part due to failure of the Contractor to correct conditions unsafe for workmen or the general public, carry out provisions of the Contract, perform conformance work, or to carry out orders. The Engineer shall submit a written order to the Contractor for work which must be suspended or resumed. Nothing in this provision shall be construed as establishing responsibility on the part of the Engineer for safety which is the responsibility of the Contractor.

The Engineer or Resident Project Representative shall keep a daily record of weather and flood conditions and may suspend the Work as deemed necessary due to periods of unsuitable weather, conditions considered unsuitable for execution of the Work, or for any other condition or reason deemed to be in the public interest.

GP-15 CONFORMITY WITH PLANS AND SPECIFICATIONS

All work and materials involved with the Work shall conform with the lines, grades, cross sections, dimensions, and other requirements shown on the Plans or indicated in these Specifications unless otherwise approved by the Engineer.

GP-16 CLARIFICATIONS AND AMENDMENTS TO CONTRACT DOCUMENTS

The Contract Documents may be clarified or amended by the Engineer to account for additions, deletions, and revisions to the Work after the Effective Date of the Contract. The clarifications and amendments shall be addressed by either a Change Order or a written clarification by the Engineer. The Contractor shall not proceed with the Work until the Change Order or clarification has been issued by the Engineer. The Contractor shall not be liable to the Owner or Engineer for failure to report any such discrepancy unless the Contractor had reasonable knowledge.

The Contractor may request a clarification or amendment for the following:

- a. Any conflict, error, ambiguity, or discrepancy within the Contract Documents; or
- b. Any conflict, error, ambiguity, or discrepancy between the Bid Documents and the provision of any Law or Regulation applicable to the performance of the Bid; or
- c. Any standard, specification, manual, or code (whether or not specifically incorporated by reference in the Bid Documents); or
- d. Instructions by a supplier.

The written clarification shall be filled out appropriately by the Contractor and submitted to the Engineer. The Engineer shall clarify the issue in writing on either the Field Order or a Change Order and submit it to the Contractor.

GP-17 SUBCONTRACTS

The Contractor shall provide the names of all Subcontractors to the Engineer in writing before awarding any Subcontracts. The Contractor shall be responsible for the coordination of the trades and Subcontractors engaged in the Work. The Contractor is fully responsible to the Owner for the acts and omissions of all the Subcontractors. The Owner and Engineer will not settle any differences between the Contractor and Subcontractors or between Subcontractors. The Contractor shall have appropriate provisions in all Subcontracts to bind Subcontractors to the Contractor by the terms of the General Provisions and other Contract Documents, as applicable to the Work of Subcontractors. The provisions should provide the Contractor the same power regarding termination of Subcontracts that the Owner may exercise over the Contractor under any provisions of the Contract Documents.

GP-18 WORKERS, METHODS, AND EQUIPMENT

The Contractor shall provide competent, qualified, and trained personnel to perform the Work. The Contractor shall not employ any person found objectionable by the Engineer. Any person employed by the Contractor or any Subcontractor who, in the opinion of the Engineer, does not perform the Work in a proper, skillful, and orderly manner shall be immediately removed upon receiving a written order by the Engineer. The Engineer may also suspend the Work until the Contractor removes the employee or provides a suitable replacement. Such an employee shall not be re-employed in any portion of the Work without written approval from the Engineer.

The on-site superintendent for the Contractor shall be competent, English-speaking, and qualified to receive orders, supervise, and coordinate all Work for the Contractor and any Subcontractors. The qualifications of the superintendent must be established and approved by the Engineer prior to commencement of the Work. The superintendent shall be furnished by the Contractor regardless of how much Work may be sublet. In the performance of the Work under this Contract, the Contractor shall conduct operations to avoid interference with any other Contractors.

All equipment, products, and material incorporated into the Work shall be as specified, or if not specified, shall be new, of good quality, and protected, assembled, used, connected, applied, cleaned, and conditioned in accordance with the manufacturer's instructions, except as otherwise may be provided in the Bid Documents. All equipment shall be of sufficient size and mechanical condition to meet the requirements of the Work and produce a satisfactory quality of work. Equipment shall not damage adjacent property throughout the performance of the Work. The Plant and Equipment Schedule should be completed by the Contractor.

The Contractor shall be solely responsible for the means, methods, techniques, sequences, and procedures used to complete the Work in conformance with the Contract Documents.

The Contractor shall obtain permission from the Engineer if a method or type of equipment other than specified in the Contract is desired. The request shall be in writing and shall include a full description of the methods, equipment proposed, and reasons for the modification. A proposed item of material or equipment may be considered by the Engineer to be functionally equal to an item specified in the Contract if:

- a. It is at least equal in quality, durability, appearance, strength, and design characteristics;
- b. There is no increase in any cost including capital, installation, or operating to the Owner;
- c. The proposed item will conform substantially, even with deviations, to the detailed requirements of the item named in the Bid Documents.

If, after trial use of the substituted methods or equipment, the Engineer determines that the Work produced does not meet Contract requirements, the Contractor shall discontinue use of the substituted methods or equipment and shall complete the Work with the specified methods and equipment. The Contractor shall remove the deficient Work and replace it with Work of specified quality or take other corrective action as directed. No change will be made in

basis of payment for construction items involved or in Contract Time as a result of authorizing a change in methods or equipment.

GP-19 ACCIDENT PREVENTION, INVESTIGATIONS, AND REPORTING

The Contractor shall be responsible to develop and maintain all safeguards and safety precautions necessary to prevent damage, injury, or loss throughout the performance of the Work. All accidents at the Project Site shall be investigated by the immediate supervisor of employee(s) involved and reported to the Engineer or Resident Project Representative within one (1) working day. A complete and accurate written report of the accident including estimated lost time days shall be submitted to the Engineer within four (4) calendar days. A follow-up report shall be submitted to the Engineer if the estimated lost time days differ from the actual lost time days.

GP-20 PRESERVATION AND RESTORATION OF PROPERTY, MONUMENTS, ETC.

The Contractor shall comply with all applicable laws, ordinances, rules, and regulations of any government agency having jurisdiction over the preservation and protection of public and private property. The Contractor shall install and maintain suitable safeguards and safety precautions during the Work as necessary to prevent damage, injury, or loss to property. This responsibility shall remain with the Contractor until the Work has been completed and accepted. Any damage, injury, or loss to property which is caused by the Contractor or Subcontractors shall be repaired or replaced at the expense of the Contractor.

The Contractor shall protect all land monuments, State and United States bench marks, geodetic and geological survey monuments, and property markers from disturbance or damage until an authorized agent has witnessed or otherwise referenced their location. The Contractor shall also provide protection for all public and private property including trees, utilities, pipes, conduits, structures, etc. These items shall not be removed unless directed by the Engineer. The Contractor shall be responsible to completely repair all damages to public or private property due to any act, omission, neglect, or misconduct in the execution of the Work unless it is due to unforeseeable causes beyond the control of and without the fault or negligence of the Contractor, including but not restricted to acts of God, public enemies, or governmental authorities. The damage must be repaired at the expense of the Contractor before final acceptance of the Work can be granted by the Engineer. If the Contractor fails to repair the damage within forty-eight (48) hours, the Owner may independently proceed with the repairs at the expense of the Contractor by deducting the cost from the Contract. If the Contractor cannot provide for the cost of repairs, the Surety of the Contractor shall be held until all damages, suits, or claims have been settled

GP-21 PROTECTION OF THE WORK, MATERIALS, AND EQUIPMENT

It shall be the responsibility of the Contractor to protect the Work, materials, and equipment from damages or delays due to inflows, tidal rise, and storm water runoff which may occur at the Project Site. The Owner shall not be held liable or responsible for these types of delays or damages.

GP-22 LAND RIGHTS

The Owner has care, custody, control, or sufficient property interests therein for construction and operation, maintenance, repair, rehabilitation, and replacement of this alteration.

GP-23 UTILITIES

The Owner has been granted all of the temporary easements, servitudes, and right-of-way agreements from known public and private utilities in order to perform the Work. The utilities include, but are not limited to telephone, telegraph, power poles or lines, water or fire hydrants, water or gas mains and pipelines, sewers, conduits, and other accessories or appurtenances of a similar nature which are fixed or controlled by a city, public utility company or corporation.

The Contractor shall conduct the Work in such a manner as to cooperate and minimize inconveniences with utilities. Prior to commencement of the Work, the Contractor is responsible to notify all of the utilities and abide by stipulations required by the utility company(s). The Contractor shall also call Louisiana One Call at 1-800-272-3020 a minimum of five (5) working days prior to construction to locate existing utilities at the Project Site.

Any damage to utilities that is caused by the Contractor within the Project Site shall be repaired at the expense of the Contractor. The Owner will not be responsible for any delay or damage incurred by the Contractor due to working around or joining the Work to utilities left in place or for making adjustments.

Any unidentified pipes or structures which may be discovered within the limits of the Project Site shall not be disturbed and shall be reported to the Engineer as soon as possible. Construction or excavation shall not be performed around unidentified utilities without prior approval from the Engineer.

GP-24 PERMITS

Federal and State permits that are required to perform the Work, such as the Department of the Army Permit and Coastal Use Permit have been secured by the Owner. Permit conditions affecting the construction processes have been included in these Specifications. Copies of these permits will be provided to the Contractor at the pre-construction conference. These permits will not relieve the responsibility of the Contractor from obtaining any additional permits which may be needed to complete the Work. Copies of any special permits that are obtained by the Contractor must be submitted to the Owner. The Contractor shall conform to the requirements therein and display copies of the permits in a public setting at the Project Site at all times.

GP-25 PROJECT SITE CLEAN-UP

The Contractor shall keep the Project Site free from accumulations of waste material or trash at all times. All trash and waste materials shall be removed by the Contractor and disposed off-site in an approved waste disposal facility. In addition, all equipment, tools, and non-conforming work shall also be removed prior to the Work being accepted. No materials shall be placed outside of the Project Site.

GP-26 OWNER INSPECTION

The Owner and Resident Project Representative shall have the right to perform reasonable inspections and testing of the Work at the Project Site. Access shall be granted to the

entire Project Site including all materials intended for use in the Work. The Contractor shall allow reasonable time for these inspections and tests to be performed. The inspections shall not relieve the Contractor from any obligation in accordance with the requirements of the Contract.

The Owner shall notify the Contractor prior to all tests, inspections, and approvals of the Work which are to be conducted at the Project Site. The Owner shall also provide the Contractor with the written results of all inspections and tests. Inspections, tests, or Payments made by the Owner shall not constitute acceptance of non-conforming Work or prejudice the Owner's rights under the Contract.

GP-27 DUTIES OF RESIDENT PROJECT REPRESENTATIVE

A Resident Project Representative shall be assigned by the Engineer to the Project Site to observe the Contractor and monitor the progress and manner in which the Work is being performed. The Resident Project Representative will also report to the Engineer and Contractor whenever materials or Work fail to comply with the Contract. The Resident Project Representative is authorized to reject any materials or suspend work which does not comply with the Contract until the issue is resolved by the Engineer.

However, the Resident Project Representative is not authorized to revoke, alter, enlarge, relax, or release any requirements of the Contract, or to approve or accept any portion of the Work, or to issue instructions contrary to the Plans and Specifications. The Resident Project Representative shall not manage or perform duties for the Contractor.

GP-28 CONSTRUCTION STAKES, LINES, AND GRADES

The Engineer shall direct the Contractor to all control points necessary for setting stakes and establishing lines and grades as shown on the Plans. The Contractor shall be responsible for laying out all of the Work. All layouts shall be witnessed and verified by the Engineer or Resident Project Representative prior to beginning the Work. The Contractor shall be responsible for proper execution of the Work according to the layouts after receiving verification from the Engineer.

The Contractor shall be responsible for furnishing and maintaining stakes such that the Work can be verified for acceptance. The Engineer may suspend the Work at any time if it cannot be adequately verified due to the number, quality, or condition of the stakes.

GP-29 CONTRACTOR'S RESPONSIBILITY FOR WORK

The Contractor shall execute all items covered by the Contract, and shall furnish, unless otherwise definitely provided in the Contract, all materials, implements, machinery, equipment, tools, supplies, transportation, and labor necessary to complete the Work. The Contractor shall pay constant attention to the progress of the Work and shall cooperate with the Engineer in every way possible. The Contractor shall maintain a complete copy of the Contract at all times, including the Plans, Specifications, and any authorized modifications.

GP-30 ENVIRONMENTAL PROTECTION

The Contractor shall comply with and abide by all federal, state, and local laws and regulations controlling pollution of the environment, including air, water, and noise. The Contractor shall take precautions to prevent pollution of waters and wetlands with fuels, oils, bituminous materials, chemicals, sewage, or other harmful materials and contaminants, and to prevent pollution of the atmosphere from particulate and gaseous matter, in accordance with all terms and conditions of federal, state, and local air and water pollution control laws and programs and their rules and regulations, including the federal Clean Air Act and the federal Clean Water Act.

The Contractor shall adhere to the provisions which require compliance with all standards, orders, or requirements contained under Section 306 of the Clean Air Act and Section 508 of the Clean Water Act, which prohibit the use under non-exempt Federal contracts, grants, or loans, of facilities included on the Environmental Protection Agency (EPA) list of Violating Facilities.

Construction operations in rivers, streams, lakes, tidal or coastal waters, reservoirs, canals, wetlands, and any other impoundments shall be restricted to areas where it is necessary to accomplish the Work and performed in accordance with any applicable federal, state, and local laws, regulations, permit requirements, and guidelines, and the Contractor shall conduct the Work in a manner that will not cause damaging concentrations of silt or pollution to water.

Contractor shall maintain and operate equipment to minimize noise, dust, and vibration near noise, dust and vibration-sensitive areas such as churches, hospitals, schools, and residential areas, and assure that any activities conducted near such areas are not unduly disruptive. Contractor shall maintain all equipment with properly functioning mufflers.

The Contractor shall be responsible for determining and utilizing any erosion and pollution control features or methods that may be necessary to comply with all federal, state, and local laws and regulations.

When any item having apparent historical or archeological interest is discovered in the course of any construction activities, then no work will proceed in the area containing these cultural resources until a CEMVN archaeologist has been notified and final coordination with the State Historic Preservation Officer and any federally-recognized Tribes has been completed. The Contractor will leave the archeological find undisturbed and shall immediately report the find to the Authority so that the proper authorities may be notified.

GP-31 SANITARY PROVISION

The Contractor shall provide and maintain sanitary accommodations for use by all employees and Subcontractors. Facilities shall comply with the requirements of the Louisiana State Board of Health and Hospitals and other authorities having jurisdiction. Committing public nuisance on the Project Site is prohibited.

GP-32 PAYMENT OF TAXES

The Contractor shall be solely responsible for all taxes and duties that maybe levied under existing State, Federal, and local laws arising in connection with the Contractor's receipt of payments made pursuant to this Agreement during the completion of the Work. The Owner will presume that the amount of such taxes is included in the unit prices bid by the Contractor and will not provide additional reimbursement.

GP-33 RADIO AND TELEPHONES

The Contractor shall furnish and maintain radio and telephone equipment throughout the Contract Time which will allow communication between the Contractor and the Engineer or Resident Project Representative.

GP-34 NAVIGATION

All marine vessels shall comply with the following Federal Laws and Regulations:

- a. The International Navigational Rules Act of 1977 (Public Law 95-75, 91 Stat. 308, or 33 U.S.C. 1601- 1608); and
- b. The Inland Navigation Rules Act of 1980 (Public Law 96-591, 94 Stat. 3415, 33 U.S.C. 2001-2038).

These rules can be found on the Internet at:
<http://www.navcen.uscg.gov/?pageName=navRulesContent>.

All marine vessels shall display the lights and day shapes required by Part C- Lights and Shapes of the Inland Navigation Rules. The location, type, color, and size of the lights and day shape shall be in accordance with Annex I - Positioning and Technical Details of Lights and Shapes. Any vessel engaged in dredging is considered a “Vessel restricted in her ability to maneuver” and shall display all the lights and shapes required in Rule 27, “Vessel Not Under Control.”

GP-35 OBSTRUCTION TO NAVIGATION

The Contractor shall minimize all obstructions to navigation in compliance with pertinent U. S. Coast Guard regulations while conducting the Work. The Contractor shall promptly move any floating equipment or marine vessels which obstruct safe passage of other marine vessels. Upon completion of the Work, the Contractor shall remove all marine vessels and other floating equipment such as temporary ranges, buoys, piles, and other marks or objects that are not permanent features of the Work.

GP-36 MARINE VESSELS AND MARINE ACTIVITIES

All marine vessels operated by the Contractor shall possess a valid United States Coast Guard (USCG) inspection certificate and current American Bureau of Shipping (ABS) Classification. All officers and crew shall possess valid USCG licenses as required by USCG regulations. These certificates, classifications, and licenses shall be posted in a public area on board each vessel.

All marine vessels not subject to USCG certification or ABS Classification shall be inspected annually by a marine surveyor accredited by the National Association of Marine Surveyors (NAMS) or the Society of Accredited Marine Surveyors (SAMS). All inspections shall be documented using an appropriate report format. At a minimum, the inspections shall evaluate the structural integrity of the vessel and comply with the National Fire Protection Association Code No. 302- Pleasure and Commercial Motor Craft. The most recent inspection report shall be posted in a public area on board each vessel.

GP-37 (RESERVED)

GP-38 (RESERVED)

GP-39 (RESERVED)

GP-40 RECORD KEEPING

The Contractor shall maintain orderly records of the Progress Schedule, Daily Progress Reports, Progress Meetings, correspondence, submittals, reproductions of original Contract Documents, Change Orders, Field Orders, certificates, additional drawings issued subsequent to the executed Contract, clarifications and interpretations of the Contract Documents by the Engineer, and other related documents at the Project Site until all of the Work is accepted by the Engineer.

GP-41 CERTIFICATES OF COMPLIANCE

Any certificates required for demonstrating proof of compliance of materials with specification requirements shall be executed in three (3) copies. Each certificate shall be certified by an authorized agent of the supplying company and shall contain the name and address of the Contractor, the project name and location, and the quantity and date of shipment. Copies of laboratory test reports submitted with certificates shall contain the name and address of the testing laboratory and the testing date. The Contractor shall also certify that all materials and test reports conform to the requirements of the Contract. Certification shall not be construed as relieving the Contractor from furnishing satisfactory material if the material is tested and determined to be in nonconformance.

GP-42 SUBMITTALS

The Contractor shall review all Submittals for compliance with the requirements of the Contract prior to delivery to the Engineer. Each Submittal shall contain a signed statement by the Contractor that it complies with the Contract requirements with any exceptions explicitly listed. The Contractor shall comply with these requirements for Submittals from Subcontractors, manufacturers, and suppliers.

All Submittals shall include sufficient data to demonstrate that the requirements of the Contract are met or exceeded. All submittals shall be legible and marked with the project title and clearly identify the item submitted. Each submittal package shall include an itemized list of the items submitted.

All Submittals will be reviewed within fourteen (14) days after being received by the Engineer. The Contractor shall allow the Engineer sufficient time for review, corrections, and resubmission of all Submittals prior to beginning the associated Work. The Contract Time shall not be extended based on incorrect or incomplete Submittals.

The Contractor shall maintain a submittal register for the project in accordance with the specifications. The submittal register shall show items or equipment and materials for which submittals are required by the specifications; this submittal register may not be all inclusive and additional submittals may be required. The Authority will provide the initial submittal register in electronic format. Thereafter, the Contractor shall maintain a complete list of all submittals, including completion of all data columns. Dates on which submittals are received

and returned by the Authority will be included in its export file to the Contractor. The Contractor shall track all submittals.

GP-43 CLAIMS FOR EXTRA COST

The Contractor is expected to complete the Work for the Contract Price specified in the Contract Documents. If the Contractor deems additional compensation is due for work, materials, delays or other additional costs/or expenses not covered in the Contract or not ordered as extra work, the Contractor shall give the Engineer written notice thereof within fourteen (14) calendar days after the receipt of such instructions and, in any event, before commencing the work. The Contractor shall justify the claim for extra cost by providing supporting data and calculations. The Engineer shall determine whether the Contractor is entitled to be compensated for such extra cost and shall make any required adjustments of the Contract in accordance with GP-43. If no written claim is made within this fourteen (14) calendar-day period, the Contractor will be deemed to have waived any claim for extra cost for such work.

Claim for damages or delays of the Work shall not be made by the Contractor for a relocation of the construction operation or portions thereof to other locations within the geographical scope of the project, when in the opinion of the Engineer, such relocation is necessary for the most effective prosecution of the Work and may be accomplished without undue hardship.

GP-44 ALTERATION OF THE CONTRACT AND COMPENSATION

Using Change Orders, Field Orders, or Written Amendments, the Owner may order extra work or make changes by altering the details of construction, add to or deduct from the Work. The requirements and stipulations of these documents shall be binding on the Owner and Contractor throughout the remainder of the Contract. Any claim for an extension of Contract Time caused thereby shall be adjusted at the time of ordering such change.

The value of any such extra work or change shall be determined in one or more of the following ways and in the following priority:

- a. By application of the unit prices in the Contract to the quantities of the items involved or subsequently agreed upon; or
- b. By mutual acceptance between the Owner and Contractor of a lump sum.

If none of the above methods is agreed upon, the Contractor, provided he is so ordered by the Owner in writing, shall proceed with the Work on a "force account" basis. In such a case, the Contractor shall keep and preserve in such form as the Engineer may direct, a correct itemized account of the direct cost of labor, materials, equipment, together with vouchers bearing written certification by the Contractor. In any case, the Engineer shall certify to the amount, including an allowance of fifteen percent (15%) for jobsite and home office overhead indirect expenses and profit due to the Contractor. Where such change involves a subcontractor, an allowance of fifteen percent (15%) for overhead and profit shall be due the subcontractor and an allowance of ten percent (10%) shall be due the Contractor. Pending final determination of value, payments on account of changes shall be made on the Engineer's estimate and as approved in an executed Change Order.

If the Contractor is prevented from completing the Work according to the Contract Price due to the Owner, the Contractor may be entitled to any reasonable and necessary addition of cost as determined by the Engineer. Neither the Owner nor the Contractor shall be entitled to any damages arising from events or occurrences which are beyond their control, including but not limited to fires, floods, epidemics, abnormal weather conditions, acts of God, acts of war, and other like matters. The provisions of this section exclude recovery for damages caused by the Contractor and compensation for additional professional services by either party.

GP-45 EXTENSION OF CONTRACT TIME

The Contractor is expected to complete the Work within the Contract Time specified in the Bid Documents. A legitimate increase of the Contract time may be requested by the Contractor throughout the course of the Work. This Claim must be submitted to the Engineer in writing within fourteen (14) days of the event which caused the time delay to the Contractor. If an extension of Contract Time involves an increase in Contract Price, both claims shall be submitted together. The Contractor shall justify the increase of the Contract Time in the Claim using supporting data and calculations. The Engineer may deny the claim if there is insufficient information to make a determination. The Contract Time shall be increased on a basis that is commensurate with the amount of additional or remaining Work. For example, the Contract Time can be increased where the number of actual adverse weather days exceeds the number of days estimated in the Contract.

GP-46 TIME EXTENTIONS FOR UNUSUALLY SEVERE WEATHER

This provision specifies the procedure for the determination of time extensions for unusually severe weather in accordance with GP-7 and GP-46. In order for the Owner to award a time extension under this clause, the following conditions must be satisfied:

- 9.1 The weather experienced at the Project Site during the Contract Time must be found to be unusually severe; that is, more severe than the adverse weather anticipation for the Project Site during any given month as listed in GP-7;
- 9.2 The unusually severe weather must actually cause a delay to the completion of the Project. The delay must be beyond the control and without the fault or negligence of the Contractor. Throughout the Contract, the Contractor will record on the Daily Progress Report, the actual occurrence of adverse weather and resultant impact to normal scheduled work. Actual adverse weather delay days must prevent work on critical activities for fifty percent (50%) or more of the Contractor's scheduled work day. The number of actual adverse weather delay days shall include days impacted by actual adverse weather (even if adverse weather occurred in previous month) be calculated chronologically from the first to the last day of each month and be recorded as full days. If the number of actual adverse weather delay days exceeds the number of anticipated days, the Engineer may grant an extension of Contract Time, giving full consideration for equivalent fair-weather work days, in accordance with GP-46.

GP-47 OWNER'S RIGHT TO TERMINATE CONTRACT FOR CAUSE OR CONVENIENCE

47.1 TERMINATION FOR CAUSE

The Owner shall submit a written notice to the Contractor and Surety which justifies

placement of the Contractor in default if:

- a. The Work is not begun within the time specified in the Notice to Proceed; or
- b. The Work is performed with insufficient workmen, equipment, or materials to assure prompt completion; or
- c. The Contractor performs unsuitable, neglected or rejected work, refuses to remove materials; or
- d. The Work is discontinued; or
- e. The Work is not completed within the Contract Time or time extension; or
- f. Work is not resumed within a reasonable time after receiving a notice to continue; or
- g. The Contractor becomes insolvent or is declared bankrupt, or commits any act of bankruptcy or insolvency; or
- h. The Contractor allows any final judgment to stand unsatisfied for a period of ten (10) days; or
- i. The Contractor makes an assignment for the benefit of creditors; or
- j. The Work is not performed in an acceptable manner.

If the Contractor or Surety does not remedy all conditions cited in the written notice within two (2) days after receiving such a notice, except as provided in sub-section h. above, the Contractor will be in default and the Owner shall remove the Contractor from the Work. If the Contractor is placed into default, the Owner may obtain the necessary labor, materials, and equipment or enter into a new Contract in order to complete the Work.

If the Contractor is placed into default, all costs incurred by the Owner for completing the Work will be deducted from the payment due the Contractor, including any costs, expenses and attorney fees incurred in connection with the completion of the work, without prejudice to other remedies the Owner may have under this Contract. If the expense exceeds the sum payable under the Contract, the Contractor and Surety shall be liable to pay the Owner the difference.

47.2 TERMINATION FOR CONVENIENCE

Owner may, at any time, terminate this Contract or any portion thereof, for Owner's convenience, upon providing written notice to the Contractor. In such case, Contractor shall be paid for all work completed through the date notice was provided (less payments already received) and reasonable demobilization and restocking charges incurred and reasonable overhead and profit based upon industry standards on the work performed. In no event shall the Contractor be entitled to payment of overhead and profit on work not performed. In the event it is determined that the Contractor was wrongfully terminated for cause, pursuant to Section GP 45.1 above, such termination shall be automatically converted to a termination for convenience under and payment made as provided under this Section.

GP-48 TEMPORARY SUSPENSION OF WORK

The Engineer shall have the authority to temporarily suspend the Work in whole or in part. A Field Order shall be issued to the Contractor for any of the Work that is suspended for periods exceeding one (1) calendar day. The Field Order shall include the specific reasons and details for the suspension. The Contract Time shall not be extended if the Work is suspended due to failure by the Contractor to comply with a Field Order or with the Plans and Specifications. If the Work is suspended in the interest of the Owner, the Contractor shall make due allowances for the lost time.

GP-49 NON-CONFORMING AND UNAUTHORIZED WORK

Work not conforming to the Plans, Specifications, Field Orders, or Change Orders shall not be accepted for payment. Unacceptable or unauthorized work shall be removed and replaced in an acceptable manner at the expense of the Contractor in order to obtain final acceptance of the Work.

If the Contractor should neglect to prosecute the work properly or fail to perform any provision of this Contract, the Owner after seven (7) calendar days written notice to the Contractor, may correct such deficiencies itself or by use of other contractors without prejudice to any other remedy it may have, and may deduct the cost thereof from the payment then or thereafter due to the Contractor.

GP-50 CONTRACTOR'S RIGHT TO TERMINATE CONTRACT

The Contractor may terminate the Contract or Work and recover payment from the Owner for labor and materials if the Work is stopped through no act or fault of the Contractor for more than three (3) months. For example, such an occurrence could be caused by a court order or other public authority. In any case, the Contractor shall submit a written notice to the Engineer at the beginning of the occurrence, and a written Claim to the Owner at the end of the occurrence.

GP-51 BREACH OF CONTRACT

The Owner shall submit a written Claim to the Contractor regarding any breach of the Contract. The Contractor must provide a written response to the Owner regarding the breach of Contract within ten (10) days after the Claim. This response must provide either an admission to the Claim or a detailed denial based on relevant data and calculations. The failure of the Contractor to provide a proper response within ten (10) days shall result in justification of the Claim by default.

GP-52 NO WAIVER OF LEGAL RIGHTS

The Owner shall not be prevented from recovering costs from the Contractor, Surety, or both due to failure of the Contractor to fulfill all of the obligations under the Contract. If a waiver is provided to the Contractor for a breach of Contract by the Owner, it shall not apply to any other breach of Contract. Final acceptance of the Work shall not prevent the Owner from correcting any measurement, estimate, or certificate. The Contractor shall be liable to the Owner without prejudice to the terms of the Contract or any warranty for latent defects, fraud,

or gross negligence.

GP-53 LIABILITY FOR DAMAGES AND INJURIES

To the fullest extent permitted by Laws and Regulations, the Contractor shall indemnify and hold harmless the Owner, Orleans Levee District, Engineer, and their officers, employees, representatives, and/or agents from all suits, actions, claims, costs, losses, demands, and judgments (including but not limited to fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) brought because of injuries or damage sustained by a person or property due to the operations of Contractor; due to negligence in safeguarding the Work, or use of unacceptable materials in constructing the Work; or any negligent act, omission, or misconduct of the Contractor; or claims or amounts recovered under the Workmen's Compensation Act or other law, ordinance, order, or decree; any money due the Contractor as considered necessary by the Owner for such purpose may be retained for use of the Owner or in case no money is due, the performance and payment bond may be held until such suits, actions, claims for injuries or damages have been settled and suitable evidence to that effect furnished to the Owner; except that money due the Contractor will not be withheld when the Contractor produces satisfactory evidence that adequate Workman's Compensation, Public Liability, and Property Damage Insurance are in effect.

The indemnification obligations of the Contractor shall not extend to the liability of the Owner, Engineer, and their affiliates arising out of the preparation or approval of the Plans, Specifications, maps, opinions, reports, surveys, or Change Orders or for the intentional acts or gross negligence of the Owner, Engineer and their officers, employees, representatives, and/or agents.

Should the Owner or Contractor suffer from any injury or damage due to an error, omission, or act of the other party or their legally liable affiliates, a written Claim shall be submitted to the other party within ten (10) days. The Claim shall provide all details regarding the injury or damage, the results of any investigations, and the action to be taken to prevent any recurrence.

GP-54 LIABILITY FOR LOSSES BY ACTS OF THE GOVERNMENT

The Owner shall not be liable for any loss or damage suffered by the Contractor arising out of a cessation of Work under this Contract due to any act or order of any local, state, or federal government agency. If this cessation occurs, the Contractor may request an extension of the Contract Time according to the provisions in GP-44.

GP-55 SUBSTANTIAL COMPLETION AND NOTICE OF ACCEPTANCE

Upon notice from the Contractor that it believes the project has reached substantial completion, and before final acceptance, the Engineer will make an inspection of the Work. "Substantial Completion" is defined as the date on which the Work is complete in accordance with the Contract Documents in order that the Owner can occupy and use the project for its intended use. The date of Substantial Completion shall be specified in the Notice of Acceptance.

If the Owner or its representative determines the Project is substantially complete, the Owner shall issue a Notice of Acceptance identifying the date the Project reached Substantial

Completion and attach a punch list, if applicable, identifying the remaining items that must be completed before final payment. The Contractor shall then file the executed Notice of Acceptance with the Clerk of Court in the Parish where the work is performed and shall forward one copy of the recorded acceptance to the Owner and Engineer.

If the inspection discloses any work as being unsatisfactory or incomplete and such work generates a formal punch list, the Engineer will give the Contractor instructions for correction of same, and the Contractor shall immediately comply with such instructions. Upon satisfactory completion of the corrections, when a "Punch List" is generated, the Engineer shall prepare a "Recommendation of Acceptance" incorporating the punch list and submit to the Owner. Upon approval of the Recommendation of Acceptance, the Owner may issue a Notice of Acceptance of the Contract which shall establish the date of Substantial Completion.

In accordance with Louisiana Revised Statutes Title 38, Section 2248(B), any punch list generated during this project shall include the cost estimates for the particular items of work based on the mobilization, labor, material, and equipment costs of each punch list item. The Owner shall retain his working papers used to determine the punch list items cost estimates should the matter be disputed later. The Owner shall not withhold from payment more than the value of the punch list. Punch list items completed shall be paid upon expiration of the forty-five day retainage period provided for under the Louisiana Public Works Act and delivery of a clear Lien & Privilege Certificate. La.Rev.Stat. 38:2248, et seq.

If the dollar value of the punch list exceeds the amount of funds, less retainage amount, in the remaining balance of the Contract, the Project shall not be accepted as Substantially Complete. If the funds remaining are less than required to complete the punch list work, the Contractor shall pay the difference. The provisions listed above shall not be subject to waiver.

Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work/project as provided in the Notice of Acceptance, unless otherwise agreed to in writing by the Owner and Contractor. In the instance where the Owner has accepted the Work/project as substantially complete and issued a Notice of Acceptance, and the Contractor must remain on the premises to complete the "Punch List" or for whatever reason, the Contractor shall maintain Commercial General Liability insurance, Auto Liability insurance and Worker's Compensation insurance as set forth herein until the expiration of the forty-five (45) day lien period or upon the completion of the work/project, whichever is later. Builder's Risk insurance, if applicable, may be cancelled only with the written permission of the Owner or the Owner's representative at Substantial Completion.

If the punch list is not completed within forty-five (45) days, through no fault of Owner or Engineer, the Owner may, but is not required, to place the Contractor in default. Thereafter, the Owner shall notify the Surety. If the Surety has not completed the punch list within forty-five days of receipt of notification, the Owner may, but is not required to, complete the remaining punch list items. Any costs incurred shall be paid for first out of any remaining Contract funds. If the costs incurred exceed the remaining Contract funds, the Contractor and its Surety shall be liable for such costs.

Upon completion of the punch list, Contractor shall request Final Inspection.

GP-56 FINAL INSPECTION AND ACCEPTANCE

Whenever the work provided for, or contemplated by the contract, have been satisfactorily completed, all punch list items completed and the final cleaning up is performed, the Engineer shall be notified in writing that said work is completed and ready for final inspection. The Engineer shall, unless otherwise provided, make the final inspection within a reasonable length of time after the receipt of such notification.

If all construction provided for in the contract is found completed to the Engineer's satisfaction that inspection shall constitute the final inspection and the Engineer will make recommendation to the Owner for final acceptance and notify the Contractor in writing of this recommendation of acceptance.

GP-57 AS-BUILT DRAWINGS

The Contractor shall submit all originals and copies of the As-Built Drawings to the Engineer for review and acceptance in accordance with the Special Provisions. The As-Built Drawings shall provide complete data for quantities, dimensions, specified performance and design criteria, and similar items which clearly represent the services, materials, and equipment the Contractor has provided. All revision sheets shall be clearly stamped with the words "As-Built".

GP-58 COMPLETION OF CONTRACT

Notwithstanding any other provision of this Contract and all applicable and necessary time delays under Louisiana law, completion of the Contract requires all of the Work to be complete, inspected by the Engineer, accepted by the Owner as recommended by the Engineer, and after final payment is made. After the Contract is complete, the Contractor will then be released from further obligation except as set forth in the Contract Bond and Contractor's Guarantee.

GP-59 CONTRACTOR'S GUARANTEE

The Contractor is obligated to provide a written guarantee to the Owner that all of the Work conforms to the Contract Documents.

- a. The guarantee shall exclude defects or damage caused by:
 1. Abuse or improper modification, maintenance, or operation by anyone other than the Contractor; or
 2. Wear and tear under normal usage.
- b. This obligation by the Contractor shall be absolute. The following actions will not constitute acceptance of non-conformance Work or release the Contractor from obligation to furnish the Work in accordance with the Contract Documents:
 1. Observations by the Owner or Engineer; or
 2. Recommendations by the Engineer or payment by the Owner; or

3. Use of the Work by the Owner; or
4. Issuance of a notice of acceptance by the Owner pursuant to the provisions of GP-53, or failure to do so; or
5. Any inspection, test, or approval by others; or
6. Any correction to non-conforming work by the Owner.

GP-60 DISPUTE RESOLUTION

The parties shall use their best efforts to resolve all disputes in an amicable fashion. Prior to filing suit by either party with respect to any claims, or disputes arising between the parties, the disputes shall be submitted first to non-binding mediation. The mediation shall be conducted in accordance with the Construction Industry Mediation Rules of the American Arbitration Association. If the parties cannot agree to a private mediator, then the mediator shall be selected by the American Arbitration Association, upon the filing of a demand for mediation.

If the dispute is not resolved by mediation within 60 days from the request for mediation, then either party may institute legal proceedings. Any litigation involving the Owner and arising under or related to the Contract or the bidding or award thereof shall be instituted exclusively in the Civil District Court for the Parish of Orleans, State of Louisiana.

GP-61 PAYMENT

The Owner hereby agrees to pay to the Contractor as full compensation for all work performed under the contract, and/or supplemental agreements thereto, the monetary value of the actual quantities in the completed work according to the schedule of unit prices and/or lump sum prices set forth in attached bid proposal and/or duly authorized supplements thereto, and made a part of the Contract.

Partial payments under the Contract shall be made at the request of the Contractor not more than once each month, based upon partial estimates agreed to by the Contractor and Engineer and shall be furnished to the Engineer and approved by the Engineer prior to transmittal to the Owner for approval and payment.

The partial estimates will be approximately stated, and all partial estimates and payments shall be subject to corrections in the estimate rendered following the discovery of any error in any previous estimates.

The payment of the partial estimate shall be taken as verification that the work has been performed and that its quality is satisfactory, however it will in no way serve as a release to the Contractor for the responsibility of any portions thereof. The Work and any particulars relating thereto shall be subject to revision and adjustment by the Engineer and/or the Owner at any time prior to final payment, regardless of any previous action taken.

There shall be reserved from the payments provided for the Contract ten percent (10%) for contracts less than \$500,000 or five percent (5%) for contracts of \$500,000 or more, of the

estimates submitted, said sum to constitute a trust fund for the protection of and payment to any person or persons, mechanic, subcontractor or material men who shall perform any labor upon such contract, or the doing of said work, and all persons who shall supply such person or persons or subcontractors with provisions and supplies for the carrying on of such work, and shall be withheld for a minimum of forty-five (45) calendar days after final acceptance of the completed contract.

In accordance with Louisiana Revised Statutes Title 38, Section 2248(A), payment of the retainage held by the Owner shall be made forty-five (45) days after recordation of acceptance of the work in the office of the Clerk of Court, Ex-Officio Recorder of Mortgages for the Parish of Orleans, State of Louisiana and after delivery by the Contractor to the Owner of a Certificate from the Clerk of Court, Ex-Officio Recorder of Mortgages for the Parish of Orleans showing that no liens or claims have been filed in connection with the work, except for punch list items that have not been completed, which will be paid after completion of the punch list items. The cancellation of all liens and claims that might be recorded, growing out of this Contract, shall be at the cost and expense of the Contractor, and the cost of same may be retained by the Owner from payments due or to become due until the liens and claims are cancelled by the Contractor.

GP-62 PAYMENTS WITHHELD

In addition to the percentage provided for in Section GP-61 of these General Provisions and in accordance with any other provision of this Contract, the Owner may withhold such amounts from any payment as may be necessary to protect himself from loss on account of:

- a. Defective work not remedied;
- b. Claims filed or reasonable evidence indicating probable filing of claims;
- c. Failure of the Contractor to make payments properly to subcontractors or for material or labor;
- d. Reasonable evidence that the Work will not be completed within the Contract time and that the unpaid balance would not be adequate to cover damages for the anticipated delay;
- e. A reasonable doubt that the contract can be completed within the time period remaining under the contract;
- f. Damage to another contractor;
- g. Failure to submit required reports; or
- h. Modifications of the contract which necessitate the execution of change orders prior to payment of funds.

Furthermore, nothing contained in this Section shall be deemed to limit the right of the Owner to withhold liquidated damages, as stated in the Instructions to Bidders and as permitted under the Special Provisions, from any amounts which may be due and owing the Contractor for work performed under the contract.

GP-63 LIENS

Neither the final payment nor any part of the retained percentage shall come due until the Contractor shall deliver to the Owner a complete release of all liens arising out of this contract, or receipts in full in lieu thereof, and, if required by the Owner, an affidavit that so far as he has knowledge or information, the releases and receipts include all labor and material for which a lien could be filed; but if any subcontractor refuses to furnish a release or receipt in full, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against any lien, construction cost, or attorney's fees.

GP-64 DISADVANTAGED BUSINESS ENTERPRISES

It is the established policy of the Management Authority to provide reasonable opportunities for Disadvantaged Business Enterprises to compete for or perform on contracts let by the Management Authority. Toward this end, the Management Authority encourages, to the extent feasible, the structuring of major projects into categories which may be commensurate with the capabilities of Disadvantaged Business Enterprises and actively encourages major prime contractors to provide opportunities for these businesses to become involved as subcontractors. The goal for participation is 18%.

“Disadvantaged Business Enterprise” means a small business organized for profit performing a commercially useful function which is owned and controlled by one or more DBE individuals or businesses. Owned and controlled means a business in which one or more DBE owns at least fifty-one percent, or in the case of a corporation, at least fifty-one percent of the voting stock and controls at least fifty-one percent of the management and daily business operations of the business.

Whenever the decision is made to sublet any of the work required under this Contract, affirmative steps should be taken to include small business and disadvantaged/women owned business participation. A list of certified firms in each specialized field may be obtained from the Louisiana Department Of Transportation. Affirmative steps shall include the following:

1. Including qualified small and disadvantaged/women businesses on solicitation lists.
2. Assuring that small and disadvantaged/women businesses are solicited whenever they are potential sources.
3. When economically feasible, dividing total requirements into smaller tasks or quantities so as to permit maximum small and disadvantaged/women business participation.
4. Where the requirements permit, establishing delivery schedules which will encourage participation by small and disadvantaged/women businesses.
5. Using the services and assistance of the Small Business Administration, the Office of Disadvantaged Business Enterprise of the Department of Commerce and the Community Services Administration as required.

The Contractor is requested to submit a statement to the Owner detailing its efforts to comply with the DBE goal.

GP-65 EQUAL EMPLOYMENT OPPORTUNITY

The LMA is an equal opportunity employer, and looks to its Contractor, subcontractors, vendors and suppliers to take affirmative action to effect this commitment in its operations.

By submitting the bid proposal and executing the Contract, the Contractor agrees to abide by the requirements of the following as applicable: Title VI and VII of the Civil Rights Act of 1964, as amended by the Equal Opportunity Act of 1972, Federal Executive Order 11246, the Federal Rehabilitation Act of 1973, as amended, the Vietnam Era Veterans Readjustment Assistance Act of 1974, Title IX of the Education Amendments of 1972, and the Age Act of 1975, and the Contractor agrees to abide by the requirements of the Americans with Disabilities Act of 1990.

The Contractor agrees not to discriminate in its employment practices, and will render services the Contract, without regard to their race, age, color, religion, sex, national origin, veteran status, political affiliation or disabilities. Any act of discrimination committed by the Contractor, or failure to comply with these statutory obligations when applicable, shall be grounds for termination of the Contract.

GP-66 ANTI-KICKBACK CLAUSE

The Contractor agrees to adhere to the mandate dictated by the Copeland “Anti-Kickback” Act which provides that each contractor or subcontractor shall be prohibited from inducing, by any means, any person employed in the completion of the work, to give up any part of the compensation to which he is otherwise entitled.

GP-67 SUSPENSION/DEBARMENT

Contractor certifies, by signing and submitting any bid, that their company, any subcontractors, or principals are not suspended or debarred by the General Services Administration (GSA) in accordance with the requirements in OMB Circular A-133. A list of parties who have been suspended or debarred can be viewed via the internet at www.epls.gov.

Contractor agrees to secure from any contractor(s) and subcontractor(s) for the captioned project, certification that such contractor(s) and subcontractor(s) are not suspended, debarred or declared ineligible from entering into contracts with any department or agency of the Federal Government or of the State of Louisiana, or in receipt of a notice of proposed debarment or suspension.

Contractor shall provide immediate notice to Owner in the event of it or its contractor(s) or any subcontractor(s) being suspended debarred or declared ineligible by any department or agency of the Federal Government or of the State of Louisiana, or upon receipt of a notice of a proposed debarment or suspension, either prior to or after execution of this Contract.

Upon receipt of notice of suspension, debarment, or declaration that Contractor or its contractor(s) or any subcontractor(s) is/are ineligible to enter into contracts with any department or agency of the Federal Government or of the State of Louisiana, either prior to or after execution of this Contract, Owner reserves the right to review cause for said debarment, suspension, or declaration of ineligibility, and to terminate this Contract

pursuant to the terms of GP-45 OWNER'S RIGHT TO TERMINATE CONTRACT FOR CAUSE OR CONVENIENCE, or take such other action it deems appropriate under this Contract.

GP-68 LOUISIANA FIRST HIRING ACT

Contractor shall comply with the Louisiana First Hiring Act (La. R.S. 39:2201-2204), which requires that within ten (10) days of executing the Contract, Contractor shall submit the following information to the Louisiana Workforce Commission:

1. The number and types of jobs anticipated for the Work.
2. The skill level of the jobs anticipated for the Work.
3. The wage or salary range for each job anticipated for the Work.
4. Methods, if any, that the Contractor will use to recruit unemployed persons or person employed in low wage jobs to fill job openings for the Work.

END OF PART I - GENERAL PROVISIONS

PART II SPECIAL PROVISIONS

SP-1 LOCATION OF WORK

The Work to be performed is located 221 Lake Marina Avenue, New Orleans, LA 70124.

The Project Site is accessible via Lake Marina Drive. A vicinity map and project map have been included in the Plans.

SP-2 PLACEHOLDER

END OF PART II – SPECIAL PROVISIONS

DOCUMENT 00 26 00 - PROCUREMENT SUBSTITUTION PROCEDURES

1.1 DEFINITIONS

- A. **Procurement Substitution Requests:** Requests for changes in products, materials, equipment, and methods of construction from those indicated in the Procurement and Contracting Documents, **submitted prior to receipt of bids.**
- B. **Substitution Requests:** Requests for changes in products, materials, equipment, and methods of construction from those indicated in the Contract Documents, submitted following Contract award. See Section 01 25 00 "Substitution Procedures" for limited conditions under which substitution requests may be considered following Contract award.

1.2 QUALITY ASSURANCE

- A. **Compatibility of Substitutions:** Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

1.3 PROCUREMENT SUBSTITUTIONS

- A. **Procurement Substitutions, General:** By submitting a bid, the Bidder represents that its bid is based on materials and equipment described in the Procurement and Contracting Documents, including Addenda. Bidders are encouraged to request approval of qualifying substitute materials and equipment when the Specifications Sections list materials and equipment by product or manufacturer name.
- B. **Procurement Substitution Requests will be received and considered by Owner when the following conditions are satisfied, as determined by Architect; otherwise requests will be returned without action:**
 - 1. Extensive revisions to the Contract Documents are not required.
 - 2. Proposed changes are in keeping with the general intent of the Contract Documents, including the level of quality of the Work represented by the requirements therein.
 - 3. The request is fully documented and properly submitted.

1.4 SUBMITTALS

- A. **Procurement Substitution Request:** Submit to Architect. Procurement Substitution Request must be made in writing by prime contract Bidder only in compliance with the following requirements:
 - 1. Requests for substitution of materials and equipment will be considered if received no later than 10 days prior to the original date of bid opening. If the date of the bid opening is extended, that will not extend the time for substitution requests.
 - 2. **Submittal Format:** Submit three copies of each written Procurement Substitution Request, using CSI Substitution Request Form 1.5C.
 - a. Identify the product or the fabrication or installation method to be replaced in each request. Include related Specifications Sections and drawing numbers.
 - b. Provide complete documentation on both the product specified and the proposed substitute, including the following information as appropriate:
 - 1) Point-by-point comparison of specified and proposed substitute product data, fabrication drawings, and installation procedures.

- 2) Copies of current, independent third-party test data of salient product or system characteristics.
 - 3) Samples where applicable or when requested by Architect.
 - 4) Detailed comparison of significant qualities of the proposed substitute with those of the Work specified. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
 - 5) Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
 - 6) Research reports, where applicable, evidencing compliance with building code in effect for Project, from ICC-ES.
 - 7) Coordination information, including a list of changes or modifications needed to other parts of the Work and to construction performed by Owner and separate contractors, which will become necessary to accommodate the proposed substitute.
- c. Provide certification by manufacturer that the substitute proposed is equal to or superior to that required by the Procurement and Contracting Documents, and that its in-place performance will be equal to or superior to the product or equipment specified in the application indicated.
 - d. Bidder, in submitting the Procurement Substitution Request, waives the right to additional payment or an extension of Contract Time because of the failure of the substitute to perform as represented in the Procurement Substitution Request.
3. Substitution request instructions in individual specification sections may include additional requirements, however, the requirements listed in this section must be complied with entirely.
- B. Architect's Action:
1. Architect may request additional information or documentation necessary for evaluation of the Procurement Substitution Request. Architect will notify all bidders of acceptance of the proposed substitute by means of an Addendum to the Procurement and Contracting Documents.
- C. Architect's approval of a substitute during bidding does not relieve Contractor of the responsibility to submit required shop drawings and to comply with all other requirements of the Contract Documents.

END OF DOCUMENT 00 26 00

SECTION 01 10 00 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Project information.
 - 2. Work covered by Contract Documents.
 - 3. Work by Owner.
 - 4. Access to site.
 - 5. Coordination with occupants.
 - 6. Work restrictions.
 - 7. Specification and drawing conventions.
- B. Related Requirements:
 - 1. Section 01 50 00 "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Owner's facilities.

1.3 PROJECT INFORMATION

- A. Project Identification: Commons Building.
 - 1. Project Location: Orleans Marina Harbormaster Office Building
- B. Owner: State of Louisiana, Facility Planning and Control.
 - 1. Owner's Representative: Adam Gulino; 504.355.5990; agulino@nolalakefront.com.
- C. Architect: VergesRome Architects; 320 N. Carrollton Ave, Suite 100; New Orleans, LA 70119.
 - 1. Contact Person: David Reed, AIA; 504.488.7739; david@vergesrome.com.

1.4 WORK COVERED BY CONTRACT DOCUMENTS

- A. The Work of Project is defined by the Contract Documents and consists of the following:
 - 1. Removal of Hurricane Ida damaged components.
 - 2. Resecuring wood trim, replace carpeting, cleaning surfaces of dust, debris, etc., prep surfaces for painting and paint.
 - 3. Installing wet sealant systems at perimeter of window. Removing and re-installing window blinds.
 - 4. Repair damaged sections of standing seam metal roofing and damaged metal gutter section.
 - 5. Clean various surfaces throughout the facility.
 - 6. Painting interior wood and gypsum board surfaces.
 - 7. Cleaning and painting exterior wood surfaces.
 - 8. Removing existing steel pipe guard rails and hand rails. Install new steel pipe handrails and guard rails. Paint new steel pipe and guard rails.

- B. Type of Contract:
 - 1. Project will be constructed under a single prime contract.

1.5 WORK BY OWNER

- A. General: Cooperate fully with Owner for work the Owner may choose to perform so work may be carried out smoothly, without interfering with or delaying work under this Contract or work by Owner.

1.6 ACCESS TO SITE

- A. General: Contractor shall have use of Project site and certain surrounding areas as determined by the Owner for construction operations during construction period. Contractor's use of Project site is limited only by Owner's right to continue operations, perform work, and to retain other contractors on portions of Project.
- B. Use of Site: Limit use of Project site to work in areas indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
 - 1. Limits: Confine construction operations to within the work and staging areas delineated on the drawings.
 - 2. Driveways, Walkways and Entrances: Keep streets, walkways, driveways and parking lots clear and available to Owner, Owner's employees, students and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
 - a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
 - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.

1.7 COORDINATION WITH OCCUPANTS

- A. Full Owner Occupancy: Owner will occupy site, building interior and adjacent buildings during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's day-to-day operations. Do not block existing entrances and exits.
 - 1. Maintain access to existing walkways and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and approval of authorities having jurisdiction.
 - 2. Notify Owner not less than 72 hours in advance of activities that will affect Owner's operations.

1.8 WORK RESTRICTIONS

- A. Work Restrictions, General: Comply with restrictions on construction operations.
 - 1. Comply with limitations on use of public streets and with other requirements of authorities having jurisdiction.
- B. On-Site Work Hours: Not limited.
- C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after providing temporary utility services according to requirements indicated:
 - 1. Notify Architect, Project Manager and Owner not less than two days in advance of proposed utility interruptions. Note there is a portion of the project that requires the modification of gas piping to a generator that will have to be shut down. Schedule project to limit the shut down time for this utility.
 - 2. Obtain Owner's written permission before proceeding with utility interruptions.

- D. Noise, Vibration, and Odors: Coordinate operations that may result in high levels of noise and vibration, odors, or other disruption to Owner occupancy with Owner.
 - 1. Notify Architect, Project Manager and Owner not less than two days in advance of proposed disruptive operations. Note that there is an existing portion of the roof is over an existing operational radio station. Coordination for roofing tear-off and replacement will have to be arranged with the Owner and radio station.
- E. Nonsmoking Building: Smoking is not permitted on the roof or within 8 m (25 feet) of entrances, operable windows, or outdoor-air intakes.
- F. Controlled Substances: Use of tobacco products and other controlled substances within the building is not permitted.
- G. Employee Identification: Provide identification tags for Contractor personnel working on Project site. Require personnel to use identification tags at all times.
- H. Employee Screening: Comply with Owner's requirements for drug and background screening of Contractor personnel working on Project site.
 - 1. Maintain list of approved screened personnel with Owner's representative.

1.9 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 - 2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- B. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.
- C. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
 - 1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
 - 2. Abbreviations: Materials and products are identified by abbreviations published as part of the U.S. National CAD Standard and scheduled on Drawings.
 - 3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 10 00

SECTION 05 52 13 - PIPE AND TUBE RAILINGS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Steel railings (Stair S102 and upper floors of stair S101).

1.2 COORDINATION

- A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.
- B. Coordinate installation of anchorages for railings. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

1.3 ACTION SUBMITTALS

- A. Product Data:
 - 1. Manufacturer's product lines of mechanically connected railings.
 - 2. Fasteners.
 - 3. Post-installed anchors.
 - 4. Handrail brackets.
 - 5. Shop primer.
 - 6. Paint products.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
- C. Samples: For each type of exposed finish required.
 - 1. Sections of each distinctly different linear railing member, including handrails, top rails, posts, and balusters, including finish.
 - 2. Fittings and brackets.
 - 3. Assembled Sample of railing system, made from full-size components, including top rail, post, handrail, and infill. Sample need not be full height.
 - a. Show method of connecting and finishing members at intersections.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For testing agency.
- B. Welding certificates.

- C. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.
- D. Product Test Reports: For tests on railings performed by a qualified testing agency, in accordance with ASTM E894 and ASTM E935.
- E. Research Reports: For post-installed anchors, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

1.5 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel in accordance with the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
 - 2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect mechanical finishes on exposed surfaces of railings from damage by applying a strippable, temporary protective covering before shipping.

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of walls and other construction contiguous with railings by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Railings, including attachment to building construction, withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:
 - 1. Handrails and Top Rails of Guards:
 - a. Uniform load of 50 lbf/ ft. (0.73 kN/m) applied in any direction.
 - b. Concentrated load of 200 lbf (0.89 kN) applied in any direction.
 - c. Uniform and concentrated loads need not be assumed to act concurrently.
 - 2. Infill of Guards:
 - a. Concentrated load of 50 lbf (0.22 kN) applied horizontally on an area of 1 sq. ft. (0.093 sq. m).
 - b. Infill load and other loads need not be assumed to act concurrently.
- B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

2.2 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth surfaces, without seam marks, roller marks, rolled trade names, stains, discolorations, or blemishes.
- B. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails unless otherwise indicated.
 - 1. Provide type of bracket that provides 2-1/4-inch clearance from inside face of handrail to finished wall surface.

2.3 STEEL RAILINGS

- A. Source Limitations: Obtain each type of railing from single source from single manufacturer.
- B. Tubing: ASTM A500/A500M (cold formed).
- C. Pipe: ASTM A53/A53M, Type F or Type S, Grade A, Standard Weight (Schedule 40), unless another grade and weight are required by structural loads.
 - 1. Provide galvanized finish for exterior installations and where indicated.
- D. Plates, Shapes, and Bars: ASTM A36/A36M.
- E. Cast Iron Fittings: Either gray iron, ASTM A48/A48M, or malleable iron, ASTM A47/A47M, unless otherwise indicated.

2.4 FASTENERS

- A. Fastener Materials:
 - 1. Ungalvanized-Steel Railing Components: Plated steel fasteners complying with ASTM F1941/F1941M, Class Fe/Zn 5 for zinc coating.
 - 2. Hot-Dip Galvanized Railing Components: Type 304 stainless steel or hot-dip zinc-coated steel fasteners complying with ASTM A153/A153M or ASTM F2329/F2329M for zinc coating.
 - 3. Aluminum Railing Components: Type 304 stainless steel fasteners.
 - 4. Finish exposed fasteners to match appearance, including color and texture, of railings.
- B. Fasteners for Anchoring Railings to Other Construction: Select fasteners of type, grade, and class required to produce connections suitable for anchoring railings to other types of construction and capable of withstanding design loads.
- C. Fasteners for Interconnecting Railing Components:
 - 1. Provide concealed fasteners for interconnecting railing components and for attaching them to other work, unless otherwise indicated.
 - 2. Provide concealed fasteners for interconnecting railing components and for attaching them to other work, unless exposed fasteners are unavoidable or are the standard fastening method for railings indicated.
 - 3. Provide tamper-resistant flat-head machine screws for exposed fasteners unless otherwise indicated.
- D. Post-Installed Anchors: Fastener systems with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC193 or ICC-ES AC308.

1. Material for Interior Locations: Carbon-steel components zinc-plated to comply with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, unless otherwise indicated.
2. Material for Exterior Locations and Where Stainless Steel Is Indicated: Alloy Group 1 (A1) stainless steel bolts, ASTM F593, and nuts, ASTM F594.

2.5 MISCELLANEOUS MATERIALS

- A. Handrail Brackets: Cast iron (for steel railings) and cast aluminum (for aluminum railings), center of handrail 3-1/8 inches (79.4 mm) from face of railing or wall.
- B. Welding Rods and Bare Electrodes: Select in accordance with AWS specifications for metal alloy welded.
 1. For aluminum railings, provide type and alloy as recommended by producer of metal to be welded and as required for color match, strength, and compatibility in fabricated items.
- C. Etching Cleaner for Galvanized Metal: Complying with MPI#25.
- D. Galvanizing Repair Paint: High-zinc-dust-content paint, complying with SSPC-Paint 20 and compatible with paints specified to be used over it.
- E. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.
 1. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.
- F. Epoxy Zinc-Rich Primer: Complying with MPI#20 and compatible with topcoat.
- G. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.
- H. Intermediate Coats and Topcoats: Provide products that comply with Section 09 91 13 "Exterior Painting." And Section 09 91 23 "Interior Painting."
- I. Bituminous Paint: Cold-applied asphalt emulsion, complying with ASTM D1187/D1187M.
- J. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout, complying with ASTM C1107/C1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.
- K. Anchoring Cement: Factory-packaged, nonshrink, nonstaining, hydraulic-controlled expansion cement formulation for mixing with water at Project site to create pourable anchoring, patching, and grouting compound.
 1. Water-Resistant Product: At exterior locations, provide formulation that is resistant to erosion from water exposure without needing protection by a sealer or waterproof coating and that is recommended by manufacturer for exterior use.

2.6 FABRICATION

- A. General: Fabricate railings to comply with requirements indicated for design, dimensions, member sizes and spacing, details, finish, and anchorage, but not less than that required to support structural loads.
- B. Shop assemble railings to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations.

1. Clearly mark units for reassembly and coordinated installation.
 2. Use connections that maintain structural value of joined pieces.
- C. Cut, drill, and punch metals cleanly and accurately.
1. Remove burrs and ease edges to a radius of approximately 1/32 inch (1 mm) unless otherwise indicated.
 2. Remove sharp or rough areas on exposed surfaces.
- D. Form work true to line and level with accurate angles and surfaces.
- E. Fabricate connections that are exposed to weather in a manner that excludes water.
1. Provide weep holes where water may accumulate.
 2. Locate weep holes in inconspicuous locations.
- F. Cut, reinforce, drill, and tap as indicated to receive finish hardware, screws, and similar items.
- G. Connections: Fabricate railings with welded connections unless otherwise indicated.
- H. Gates: Form gates from aluminum tube of same size and shape as top rails, with infill to match guards. Provide with spring hinges for fastening to wall and overlapping stop with rubber bumper to prevent gate from opening in direction opposite egress.
- I. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.
1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove flux immediately.
 4. At exposed connections, finish exposed welds to comply with NOMMA's "Voluntary Joint Finish Standards" for Finish #2 welds; good appearance, completely sanded joint, some undercutting and pinholes okay.
- J. Welded Connections for Aluminum Pipe: Fabricate railings to interconnect members with concealed internal welds that eliminate surface grinding, using manufacturer's standard system of sleeve and socket fittings.
- K. Nonwelded Connections: Connect members with concealed mechanical fasteners and fittings. Fabricate members and fittings to produce flush, smooth, rigid, hairline joints.
1. Fabricate splice joints for field connection, using an epoxy structural adhesive, if this is manufacturer's standard splicing method.
- L. Form changes in direction as follows:
1. As detailed.
 2. [By bending] [or] [by inserting prefabricated elbow fittings].
 3. [By flush bends] [or] [by inserting prefabricated flush-elbow fittings].
 4. [By radius bends of radius indicated] [or] [by inserting prefabricated elbow fittings of radius indicated].
 5. By bending to smallest radius that will not result in distortion of railing member.
- M. Bend members in jigs to produce uniform curvature for each configuration required. Maintain cross section of member throughout entire bend without buckling, twisting, cracking, or otherwise deforming exposed surfaces of components.

- N. Close exposed ends of hollow railing members with prefabricated cap and end fittings of same metal and finish as railings.
- O. Provide wall returns at ends of wall-mounted handrails unless otherwise indicated. Close ends of returns unless clearance between end of rail and wall is 1/4 inch (6 mm) or less.
- P. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work unless otherwise indicated.
 - 1. At brackets and fittings fastened to plaster or gypsum board partitions, provide crush-resistant fillers or other means to transfer loads through wall finishes to structural supports and prevent bracket or fitting rotation and crushing of substrate.
- Q. Provide inserts and other anchorage devices for connecting railings to concrete or masonry work.
 - 1. Fabricate anchorage devices capable of withstanding loads imposed by railings.
 - 2. Coordinate anchorage devices with supporting structure.
- R. For railing posts set in concrete, provide stainless steel sleeves not less than 6 inches (150 mm) long with inside dimensions not less than 1/2 inch (13 mm) greater than outside dimensions of post, with metal plate forming bottom closure.
- S. For removable railing posts, fabricate slip-fit sockets from stainless steel tube or pipe whose ID is sized for a close fit with posts; limit movement of post without lateral load, measured at top, to not more than one-fortieth of post height.
 - 1. Provide socket covers designed and fabricated to resist being dislodged.
 - 2. Provide chain with eye, snap hook, and staple across gaps formed by removable railing sections at locations indicated. Fabricate from same metal as railings.
- T. Toe Boards: Where indicated, provide toe boards at railings around openings and at edge of open-sided floors and platforms. Fabricate to dimensions and details indicated.

2.7 STEEL AND IRON FINISHES

- A. For nongalvanized-steel railings, provide nongalvanized ferrous-metal fittings, brackets, fasteners, and sleeves; however, hot-dip galvanize anchors to be embedded in exterior concrete or masonry.
- B. Preparation for Shop Priming: Prepare uncoated ferrous-metal surfaces to comply with SSPC-SP 6/NACE No. 3.
- C. Primer Application: Apply shop primer to prepared surfaces of railings unless otherwise indicated. Comply with requirements in SSPC-PA 1 for shop painting. Primer need not be applied to surfaces to be embedded in concrete or masonry.
 - 1. Shop prime uncoated railings with [universal shop primer] [primers specified in Section 09 91 13 "Exterior Painting" and Section 09 91 23 "Interior Painting"] unless [zinc-rich primer is] [primers specified in Section 09 96 00 "High-Performance Coatings" are] indicated.
 - 2. Do not apply primer to galvanized surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine plaster and gypsum board assemblies, where reinforced to receive anchors, to verify that locations of concealed reinforcements are clearly marked for Installer. Locate reinforcements and mark locations if not already done.

3.2 INSTALLATION, GENERAL

- A. Perform cutting, drilling, and fitting required for installing railings.
 - 1. Fit exposed connections together to form tight, hairline joints.
 - 2. Install railings level, plumb, square, true to line; without distortion, warp, or rack.
 - 3. Set railings accurately in location, alignment, and elevation; measured from established lines and levels.
 - 4. Do not weld, cut, or abrade surfaces of railing components that are coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
 - 5. Set posts plumb within a tolerance of 1/16 inch in 3 feet (2 mm in 1 m).
 - 6. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed 1/4 inch in 12 feet (6 mm in 3.5 m).
- B. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.
- C. Adjust railings before anchoring to ensure matching alignment at abutting joints.
- D. Fastening to In-Place Construction: Use anchorage devices and fasteners where necessary for securing railings and for properly transferring loads to in-place construction.

3.3 RAILING CONNECTIONS

- A. Nonwelded Connections: Use mechanical or adhesive joints for permanently connecting railing components. Use wood blocks and padding to prevent damage to railing members and fittings. Seal recessed holes of exposed locking screws, using plastic cement filler colored to match finish of railings.
- B. Welded Connections: Use fully welded joints for permanently connecting railing components. Comply with requirements for welded connections in "Fabrication" Article, whether welding is performed in the shop or in the field.
- C. Expansion Joints: Install expansion joints at locations indicated but not farther apart than required to accommodate thermal movement. Provide slip-joint internal sleeve, extending 2 inches (50 mm) beyond joint on either side; fasten internal sleeve securely to one side; and locate joint within 6 inches (150 mm) of post.

3.4 ANCHORING POSTS

- A. Use stainless steel pipe sleeves preset and anchored into concrete for installing posts. After posts are inserted into sleeves, fill annular space between post and sleeve with nonshrink, nonmetallic grout, mixed and placed to comply with anchoring material manufacturer's written instructions.
- B. Rework existing post anchors to accept new guard and handrail systems. Secure post to existing post anchors.
- C. Leave anchorage joint exposed with anchoring material flush with adjacent surface.

- D. Anchor posts to metal surfaces with flanges, angle type, or floor type, as required by conditions, connected to posts and to metal supporting members as follows:
 - 1. For steel railings, weld flanges to post and bolt to metal supporting surfaces.
 - 2. For aluminum railings, attach posts as indicated, using fittings designed and engineered for this purpose.
 - 3. For stainless steel railings, weld flanges to post and bolt to supporting surfaces.

3.5 ATTACHING RAILINGS

- A. Anchor railing ends to concrete and masonry with sleeves concealed within railing ends and anchored to wall construction with anchors and bolts.
- B. Anchor railing ends to metal surfaces with flanges bolted to metal surfaces and welded to railing ends or connected to railing ends, using nonwelded connections.
- C. Attach handrails to walls with wall brackets.
 - 1. Use type of bracket with [flange tapped for concealed anchorage to threaded hanger bolt] [predrilled hole for exposed bolt anchorage].
 - 2. Locate brackets as indicated or, if not indicated, at spacing required to support structural loads.
- D. Secure wall brackets to building construction as follows:
 - 1. For concrete and solid masonry anchorage, use drilled-in expansion shields and hanger or lag bolts.
 - 2. For hollow masonry anchorage, use toggle bolts.
 - 3. For steel-framed partitions, fasten brackets directly to steel framing or concealed steel reinforcements, using self-tapping screws of size and type required to support structural loads.
- E. Install railing gates level, plumb, and secure for full opening without interference.
 - 1. Attach hardware using tamper-resistant or concealed means.
 - 2. Adjust hardware for smooth operation.

3.6 REPAIR

- A. Touchup Painting:
 - 1. Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with the same material used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - a. Apply by brush or spray to provide a minimum 2.0-mil (0.05-mm) dry film thickness.
 - 2. Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Section 09 91 23 "Interior Painting."

3.7 CLEANING

- A. Clean aluminum by washing thoroughly with clean water and soap and rinsing with clean water.
- B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas, and repair galvanizing to comply with ASTM A780/A780M.

3.8 PROTECTION

- A. Protect finishes of railings from damage during construction period with temporary protective coverings approved by railing manufacturer. Remove protective coverings at time of Substantial Completion.
- B. Restore finishes damaged during installation and construction period, so no evidence remains of correction work. Return items that cannot be refinished in the field to the shop; make required alterations and refinish entire unit, or provide new units.

END OF SECTION 05 52 13

SECTION 07 62 00 – SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Roof penetration sleeves and bonnets.
 - 2. Receivers.
 - 3. Counter flashings.
 - 4. Sanitary vent pipes.
 - 5. Curb cap flashings.
 - 6. Exhaust vents.
 - 7. Copings.
 - 8. Drip edge.
 - 9. Gutters and downspouts, to match existing at each location.
 - 10. Miscellaneous sheet metal accessories.
- B. Related Sections include the following:
 - 1. Division 07 Section "Asphalt Shingles."
 - 2. Division 07 Section "Standing Seam Metal Roof Panels."
 - 3. Division 07 Sections "Roofing System Repairs."

1.3 REFERENCES

- A. American Society for Testing and Materials (ASTM):
- B. National Roofing Contractor's Association (NRCA): NRCA Roofing and Waterproofing Manual, latest edition.
- C. Sheet Metal and Air Conditioning Contractor's National Association, Inc. (SMACNA): Architectural Sheet Metal Manual, latest edition.
- D. ANSI/SPRI ES-1 Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems.

1.4 WARRANTY

- A. Contractor's Warranty: Provide Owner a written warranty which shall warrant sheet metal work to be free of leaks and defects in materials and workmanship for two years after date of final acceptance by owner.
- B. For pre-finished metal, provide manufacturer's twenty-year guarantee covering deterioration or failure of the fluoropolymer finish.

1.5 PERFORMANCE REQUIREMENTS

- A. Fabricate and install sheet metal edge flashings to comply with ANSI/SPRI ES-1 requirements.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURER'S

- A. Accessory sheet metal components of the roofing system shall be supplied by the prime roof manufacturer. Alternate manufacturer's shall not be permitted unless pre-approved in writing by the prime roof manufacturer.

2.2 SHEET METAL MATERIAL

- A. Pre-finished Metal: "Kynar 500" or "Hylar 5000" fluoropolymer pre-finished G90 galvanized/galvalume sheet metal, minimum 24 gauge. "Kynar 500" or "Hylar 5000" finish shall consist of a two-coat Polyvinylidene fluoride, minimum 70 percent by weight in coatings, dry film thickness 1 mil, factory applied by metal manufacturer or supplier. Color to be selected by Owner and Architect from manufacturer's standard color chart.
- B. Zinc-coated (Galvanized) Sheet Metal: Commercial Quality with 0.20 percent copper, in accordance with ASTM A 526 except ASTM A 527 for lock forming; coating designation G() hot-dip galvanized, and mill phosphatized for painting in accordance with ASTM A 525 (paint-grip type), 22 gauge minimum.
- C. Sheet Lead: FS QQ-L-201, Grade B; 2-1/2 pounds per square foot, 0.0391-inches thick minimum used for sanitary vent flashing; 4 pounds per square foot (140n/m²) 0.0625-inches (1.6mm) thick minimum as used for roof drains
- D. Stainless Steel Sheet Metal: ASTM A240, Type 304, ASTM A480, No. 2B/2D Mill Finish, gauge as scheduled.

2.3 FASTENERS

- A. Fasteners shall be same metal as flashing and sheet metal being joined.
- B. Exposed fasteners shall be self-sealing or gasketed for watertight installation.
- C. Heads of fasteners, including but not limited to, rivets, screws, and bolts, that are exposed or visible shall have same manufactured finishes as item being secured; color to match when applicable.
- D. Mechanical Fasteners:
 - 1. Washers: Steel washers with bonded rubber sealing gasket.
 - 2. Screws: Self-tapping sheet metal type compatible with material fastened.
 - 3. Rivets: Stainless steel material for the stem with closed end, head of color to match sheet metal items being adjoined.

2.4 RELATED MATERIALS

- A. Solder:
 - 1. ASTM B 32, alloy grade 58, 50 percent tin, 50 percent lead.
 - 2. For Use with Stainless Steel: 60-40 tin/lead solder, ASTM B 32.

- B. Flux:
 - 1. Phosphoric acid type, manufacturer's standard.
 - 2. For Use with Steel or Copper: Rosin flux.
 - 3. For Use with Stainless Steel: Acid-chloride type flux, except use rosin flux over tinned surfaces.
- C. Underlayment: As specified in Division 7 Section "Standing Seam Metal Roof Panels".
- D. Adhesives: Type recommended by flashing sheet manufacturer for waterproof and weather resistant seaming and adhesive application of flashing sheet.
- E. Metal Accessories: Sheet metal clips, straps, anchoring devices, and similar accessory units as required for installation of work, matching or compatible with material being installed, noncorrosive, size and gauge required for performance.
- F. Termination Bar: 1/8-inch (3mm) thick, 1-inch (25mm) wide extruded aluminum bar with flat profile, factory punched oval holes (1/4-inch by 3/8-inch [6mm by 9mm]) spaced 6-inches (150mm) on-center, such as "TB 125" by The TruFast Corp. or "Heavy Flat Bar" by OMG.

2.5 FABRICATION – GENERAL

- A. Fabricate work in accordance with SMACNA Architectural Sheet Metal Manual and other recognized industry practices and approved shop drawings.
- B. Comply with material manufacturer's instructions and recommendations for forming material.
- C. Shop fabricate work to greatest extent possible. Fabricate inside and outside corners for metal edge flashings and copings from single piece with equal length legs, minimum 3 feet. Notch, lap, and seam inside and outside corners of counter flashings.
- D. Fabricate for waterproof and weather resistant performance with expansion provisions for running work sufficient to permanently prevent leakage, damage, or deterioration of work. Form work to fit substrates.
- E. Make angle bends and folds for interlocking metal with full regard for expansion and contraction to avoid buckling.
- F. Form materials with straight lines, sharp angles, smooth curves, and true levels. Avoid tool marks, buckling, and oil canning.
- G. Fold back edges of exposed ends of sheet metal edge to form hem, 6-inch minimum.
- H. Lap joints 1-inch (25mm) minimum. Rivet and solder joints on parts that are to be permanently and rigidly assembled for copper, stainless, aluminum, and galvanized sheet metal. Install rivets, spaced 1-inch (25mm) on-center and apply solder to secure and seal exposed edge of sheet metal in a uniform continuous bead with smooth top finish. Clean residue upon completion of soldering process. Fabricate sheet metal assemblies so that adjoining sections are nested to achieve continuous metal-to-metal contact.
- I. Seams:
 - 1. Fabricate non-moving seams in sheet metal with flat-lock seams.
 - 2. Pre-finished Galvanized Sheet metal: Seal pre-finished metal seams with rivets, spaced 1-inch (25mm) on-center, and silicone sealant, color to match metal finish.
 - 3. Metal Other than Aluminum: Tin edges to be seamed, form seams, and solder.

- J. Expansion Provisions: Where lapped or bayonet type expansion provisions in work cannot be used or would not be sufficiently waterproof or weatherproof, form expansion joints of intermeshing hooked flanges, not less than 1-inch deep, filled with sealant concealed within joints.

2.6 FABRICATED ITEMS

- A. Wind Clips: Minimum 24 gauge stainless steel or prefinished sheet metal, 1-inch (25mm) wide, length to engage counter flashing a minimum of 1/2-inch (13mm).
- B. Expansion Joint Cover: 24 gauge stainless steel sheet metal with 1-inch high standing seam at joints.
- C. Cleats/Clips:
 - 1. Concealed Cleats/Clips: Continuous strips, 22 gauge sheet metal, same metal type and fascia profile as adjacent metal item, with a 3/4-inch drip edge formed at a 30 degree angle with vertical wall.
 - 2. Exposed Cleats/Clips: 24 gauge prefinished or stainless steel sheet metal.
- D. Angle Termination Bar: 1-inch by 1-inch (25mm by 25mm) 24 gauge galvanized sheet metal.
- E. Drip Edge: 24 gauge pre-finished sheet metal with 6-inch wide cover plates of same material/profile. Form 3/4-inch drips with 5/8-inch returns at 30-degree angle with vertical wall at bottom end of both interior and exterior fascias.
- F. Gutters and Downspouts: 24 gauge pre-finished sheet metal with straps of the same material/profile.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that substrates are smooth and clean to extent needed for sheet metal work.
- B. Verify that reglets, nails, cants, and blocking to receive sheet metal are installed and free of debris.
- C. Do not start sheet metal work until conditions are satisfactory.

3.2 INSTALLATION

- A. Install sheet metal with lines, arises, and angles sharp and true, and plane surfaces free from objectionable wave, warp, or buckle. Exposed edges of sheet metal shall be folded back to form 1/4-inch hem on concealed side from view. Finished work shall be free from water retention and leakage under all weather conditions. Install prefabricated corners or transitions at changes in direction, elevation or plane, and at intersections. Locate field joints not less than 12-inches, not more than 3 feet from actual corner. Laps for all metals, except for prefinished metal, shall be 1-inch wide, fastened with rivets spaced 1-inch on-center and soldered.
- B. Anchor units of work securely in place to prevent damage or distortion from wind or buckling. Provide for thermal expansion of metal units; conceal fasteners where possible; and set units true to line and level as indicated. Install work with laps, joints, and seams permanently watertight and weatherproof.
- C. Install fabricated sheet metal items in accordance with manufacturer's installation instructions and recommendations and with SMACNA Architectural Sheet Metal Manual.

- D. Prime all flanged sheet metal and allow to dry completely. Set in a liberal bed of SBS modified mastic and strip in to achieve a full finished two plies of SBS modified roofing membrane.
- E. Separations: Provide for separation of metal from non-compatible metal or corrosive substrates by coating affected surfaces with zinc chromate or other permanent liquid-applied or sheet product separation at locations of contact.
- F. Continuous Cleat: At exposed edges of metal edge flashings, fascias, copings, and where required, attach continuous cleat at 6-inches on-center with appropriate fasteners metal or steel substrate. At a distance of 10 feet from each direction of corner, install fasteners spaced 3-inches on-center. Install cleat so fascia extends a minimum of 1-inch below top of exterior wall finish.

3.3 CLEANING

- A. Remove flux and residual acid immediately by neutralizing with baking soda and washing with clean water. Leave work clean and free of stains, scrap, and debris.
- B. Clean exposed metal surfaces, removing substances which might cause corrosion of metal or deterioration/damage of finishes. Paint (color to match) areas of prefinished metal where finish is damaged. Replace sheet metal items when damaged finish can not be repaired to an acceptable condition.
- C. Prime soldered area of phosphatized metal after cleaning to prevent rusting.

END OF SECTION 07 62 00

SECTION 07 92 00 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Silicone joint sealants.
 - 2. Urethane joint sealants.
 - 3. Latex joint sealants.

1.3 ACTION SUBMITTALS

- A. Product Data: For each joint-sealant product indicated.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.
- C. Samples for Verification: For each kind and color of joint sealant required, provide Samples with joint sealants in 1/2-inch- (13-mm-) wide joints formed between two 6-inch- (150-mm-) long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- D. Joint-Sealant Schedule: Include the following information:
 - 1. Joint-sealant application, joint location, and designation.
 - 2. Joint-sealant manufacturer and product name.
 - 3. Joint-sealant formulation.
 - 4. Joint-sealant color.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Product Certificates: For each kind of joint sealant and accessory, from manufacturer.
- C. Sealant, Waterproofing, and Restoration Institute (SWRI) Validation Certificate: For each sealant specified to be validated by SWRI's Sealant Validation Program.
- D. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, indicating that sealants comply with requirements.

- E. Field-Adhesion Test Reports: For each sealant application tested.
- F. Warranties: Sample of special warranties.

1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain each kind of joint sealant from single source from single manufacturer.

1.6 PROJECT CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F (5 deg C).
 - 2. When joint substrates are wet.
 - 3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
 - 4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.7 WARRANTY

- A. Special Installer's Warranty: Manufacturer's standard form in which Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Manufacturer's Warranty: Manufacturer's standard form in which joint-sealant manufacturer agrees to furnish joint sealants to repair or replace those that do not comply with performance and other requirements specified in this Section within specified warranty period.
- C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:
 - 1. Movement of the structure caused by structural settlement or errors attributable to design or construction resulting in stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
 - 2. Disintegration of joint substrates from natural causes exceeding design specifications.
 - 3. Mechanical damage caused by individuals, tools, or other outside agents.
 - 4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS**2.1 MATERIALS, GENERAL**

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.
- B. Stain-Test-Response Characteristics: Where sealants are specified to be nonstaining to porous substrates, provide products that have undergone testing according to ASTM C 1248 and have not stained porous joint substrates indicated for Project.
- C. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.2 SILICONE JOINT SEALANTS

- A. Single-Component, Nonsag, Neutral-Curing Silicone Joint Sealant; JS-#1: ASTM C 920, Type S, Grade NS, Class 100/50, for Use NT.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Dow Corning Corporation; 790.
 - b. GE Advanced Materials - Silicones; SilPruf LM SCS2700.
 - c. Pecora Corporation; 301 NS.
 - d. Sika Corporation, Construction Products Division; SikaSil-C990.
- B. Single-Component, Nonsag, Neutral-Curing Silicone Joint Sealant; JS-#2: ASTM C 920, Type S, Grade NS, Class 50, for Use NT.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Dow Corning Corporation; 795.
 - b. GE Advanced Materials - Silicones; SilGlaze II SCS2800.
 - c. May National Associates, Inc.; Bondaflex Sil 295.
 - d. Pecora Corporation; 895.
 - e. Sika Corporation, Construction Products Division; SikaSil-C995.
- C. Mildew-Resistant, Single-Component, Acid-Curing Silicone Joint Sealant; JS-#4: ASTM C 920, Type S, Grade NS, Class 25, for Use NT.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. BASF Building Systems; Omniplus.
 - b. Dow Corning Corporation; 786 Mildew Resistant.
 - c. GE Advanced Materials - Silicones; Sanitary SCS1700.
 - d. May National Associates, Inc.; Bondaflex Sil 100 WF.

2.3 URETHANE JOINT SEALANTS

- A. Polyurethane Sealant; JS-#5: ASTM C 920, Type S, Grade NS, Class 25, Use NT, M, A and O, single component, chemical curing, non-staining, non-bleeding, non-sagging:
 - 1. Sikaflex-1a; Sika Chemical Corp.

2. Sonolastic, NPI; Sonneborn/Contech, Inc.
 3. Dymonic; Tremco
 4. Vulken 921; Mameco International, Inc.
- B. Paintable.

2.4 LATEX JOINT SEALANTS

- A. Latex Joint Sealant; JS-#3: Acrylic latex or siliconized acrylic latex, ASTM C 834, Type OP, Grade NF.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. BASF Building Systems; Sonolac.
 - b. Bostik, Inc.; Chem-Calk 600.
 - c. May National Associates, Inc.; Bondaflex 600.
 - d. Pecora Corporation; AC-20+.
 - e. Schnee-Morehead, Inc.; SM 8200.

2.5 JOINT SEALANT BACKING

- A. General: Provide sealant backings of material that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin), and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.6 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint-sealant performance.

- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
 - 2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
 - d. Wood.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:
 - a. Metal.
 - b. Glass.
 - c. Glazed surfaces of ceramic tile.
- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of sealant backings.

2. Do not stretch, twist, puncture, or tear sealant backings.
 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
1. Place sealants so they directly contact and fully wet joint substrates.
 2. Completely fill recesses in each joint configuration.
 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
1. Remove excess sealant from surfaces adjacent to joints.
 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 3. Provide concave joint profile per Figure 8A in ASTM C 1193, unless otherwise indicated.
 4. Provide flush joint profile where indicated per Figure 8B in ASTM C 1193.
 5. Provide recessed joint configuration of recess depth and at locations indicated per Figure 8C in ASTM C 1193.
 - a. Use masking tape to protect surfaces adjacent to recessed tooled joints.

3.4 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

3.6 JOINT-SEALANT SCHEDULE

- A. Joint-Sealant Application: Exterior joints in wood to wood surfaces: JS-#1.
1. Joint Locations:

- a. Control and expansion joints in unit masonry.
 - b. Perimeter joints between materials listed above and frames of doors, windows and louvers.
 - c. Control and expansion joints in overhead surfaces.
 - d. Other joints as indicated.
2. Silicone Joint Sealant: Single component, nonsag, neutral curing, Class 50
- B. Joint-Sealant Application: Interior joints in vertical surfaces and horizontal non-traffic surfaces: JS-#2.
1. Joint Locations:
 - a. Perimeter joints of exterior openings where indicated.
 - b. Tile control and expansion joints.
 - c. Perimeter joints between interior wall surfaces and frames of interior doors and windows.
 - d. Crack repairs in existing CMU (with backer rod) and gypsum board.
 - e. Other joints as indicated.
 2. Joint Sealant: Latex.

END OF SECTION 07 92 00

SECTION 09 65 13 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SECTION REQUIREMENTS

- A. Submittals: Product data and Samples.
- B. Extra Materials: Deliver to Owner at least of each type and color of resilient wall base installed.
- C. Intent is to match resilient base type, height, and color at each location requiring replacement/repairs.

PART 2 - PRODUCTS

2.1 RESILIENT BASE

- A. Thermoset Rubber Base: ASTM F 1861, Type TS (rubber, vulcanized thermoset), Group I (solid, homogeneous).
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Flexco.
 - b. Johnsonite; a Tarkett company.
 - c. Roppe Corporation.
- B. Thermoplastic Rubber Base: ASTM F 1861, Type TP (rubber, thermoplastic), Group I (solid, homogeneous).
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Armstrong Flooring, Inc.
 - b. Johnsonite; a Tarkett company.
 - c. Roppe Corporation.
- C. Vinyl Base: ASTM F 1861, Type TV (vinyl, thermoplastic), Group I (solid, homogeneous).
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Armstrong World Industries, Inc.
 - b. Flexco.
 - c. Johnsonite; a Tarkett company.
 - d. Roppe Corporation.
- D. Style: Cove (base with toe).
- E. Minimum Thickness: 0.125 inch (3.2 mm).
- F. Height: 4 inches (102 mm).
- G. Lengths: Cut lengths 48 inches (1219.2 mm) long or coils in manufacturer's standard lengths.
- H. Outside Corners: Job formed.

- I. Inside Corners: Job formed.

2.2 RESILIENT MOLDING ACCESSORY

- A. Rubber Molding Accessories.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Roppe Corporation.
 - b. VPI Corporation.

- B. Vinyl Molding Accessories.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Armstrong World Industries, Inc.
 - b. Johnsonite; a Tarkett company.
 - c. Roppe Corporation.

- C. Description: Reducer strip for resilient flooring, joiner for tile and carpet, transition strips.

2.3 INSTALLATION ACCESSORIES

- A. Adhesives: Water-resistant type recommended by manufacturer to suit floor covering and substrate conditions indicated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Prepare horizontal surfaces according to ASTM F 710. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
- B. Adhesively install resilient wall base and accessories.
- C. Install wall base in maximum lengths possible. Apply to walls, columns, pilasters, casework, and other permanent fixtures in rooms or areas where base is required.
- D. Install reducer strips at edges of floor coverings that would otherwise be exposed.

END OF SECTION 09 65 13

SECTION 09 68 13 - TILE CARPETING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes modular carpet tile (multiple selections), and all floor preparation and leveling.
- B. Related Requirements:
 - 1. Section 09 65 13 "Resilient Base and Accessories" for resilient wall base and accessories installed with carpet tile.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include manufacturer's written data on physical characteristics, durability, and fade resistance.
 - 2. Include installation recommendations for each type of substrate.
- B. Shop Drawings: Show the following:
 - 1. Carpet tile type, color, and dye lot.
 - 2. Type of subfloor.
 - 3. Type of installation.
 - 4. Pattern of installation.
 - 5. Pattern type, location, and direction.
 - 6. Pile direction.
 - 7. Type, color, and location of insets and borders.
 - 8. Type, color, and location of edge, transition, and other accessory strips.
 - 9. Transition details to other flooring materials.
- C. Samples: For each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.
 - 1. Carpet Tile: Full-size Sample.
 - 2. Exposed Edge, Transition, and Other Accessory Stripping: 12-inch- (300-mm-) long Samples.
- D. Product Schedule: For carpet tile. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.

- B. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For carpet tiles to include in maintenance manuals. Include the following:
 - 1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
 - 2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Carpet Tile: Full-size units equal to 5 percent of amount installed for each type indicated, but not less than 10 sq. yd. (8.3 sq. m).

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who is certified by the International Certified Floorcovering Installers Association at the Commercial II certification level.
- B. Fire-Test-Response Ratings: Where indicated, provide carpet tile identical to those of assemblies tested for fire response according to NFPA 253 by a qualified testing agency.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Comply with CRI 104.

1.9 FIELD CONDITIONS

- A. Comply with CRI 104 for temperature, humidity, and ventilation limitations.
- B. Environmental Limitations: Do not deliver or install carpet tiles until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at occupancy levels during the remainder of the construction period.
- C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended by carpet tile manufacturer.
- D. Where demountable partitions or other items are indicated for installation on top of carpet tiles, install carpet tiles before installing these items.

1.10 WARRANTY

- A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.
1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
 2. Failures include, but are not limited to, more than 10 percent edge raveling, snags, runs, dimensional stability, excess static discharge, loss of tuft bind strength, loss of face fiber, and delamination.
 3. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS**2.1 CARPET TILE**

- A. Basis-of-Design Products (CPT-1): Subject to compliance with requirements, provide the following:
1. Interface, as indicated in the drawings finish schedule.
 2. Size: 9" x 36"
 3. Installation: Ashlar Pattern.

2.2 INSTALLATION ACCESSORIES

- A. Floor Leveling Materials: Self-leveling Portland cement-based material.
1. Bring existing second floor up to level to accept new floor finishes, approximately 2" thick.
 2. Areas of first floor where existing floor openings are closed and where existing walls are removed, to prepare for patching compounds and new terrazzo and other floor finishes.
 3. Areas of the ground floor where existing walls are removed, to prepare for patching compounds and new floor finishes.
- B. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.
- C. Adhesives: Water-resistant, mildew-resistant, non-staining, pressure-sensitive type to suit products and subfloor conditions indicated, that complies with flammability requirements for installed carpet tile and is recommended by carpet tile manufacturer for releasable installation.
1. Adhesives shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- D. Edge/Transition Strips: Extruded aluminum with mill finish and rubber of profile and width shown, of height required to protect exposed edge of carpet, and of maximum lengths to minimize running joints. See Finish Legend.

PART 3 - EXECUTION**3.1 EXAMINATION**

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance. Examine carpet tile for type, color, pattern, and potential defects.
- B. Concrete Subfloors: Verify that concrete slabs comply with ASTM F 710 and the following:
 - 1. Slab substrates are dry and free of curing compounds, sealers, hardeners, and other materials that may interfere with adhesive bond. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by carpet tile manufacturer.
 - 2. Subfloor finishes comply with requirements specified in Division 03 Section "Cast-in-Place Concrete" for slabs receiving carpet tile.
 - 3. Subfloors are free of cracks, ridges, depressions, scale, and foreign deposits.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. General: Comply with CRI 104, Section 6.2, "Site Conditions; Floor Preparation," and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile installation.
- B. The Contractor shall be responsible for correcting non-conforming concrete floor substrates (excessive moisture content, etc. adversely affecting the proper bonding and long-term adhesion of the finish flooring to the substrate), using materials compatible with the specified flooring systems and as approved by the flooring manufacturer. Such correction of non-conforming concrete floor substrates shall be made without additional cost or time added to the Construction Contract.
- C. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch (3 mm) wide or wider and protrusions more than 1/32 inch (0.8 mm) unless more stringent requirements are required by manufacturer's written instructions.
- D. Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by carpet tile manufacturer.
- E. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

- A. General: Comply with CRI 104, Section 14, "Carpet Modules," and with carpet tile manufacturer's written installation instructions.
- B. Installation Method: As recommended in writing by carpet tile manufacturer.
- C. Maintain dye lot integrity. Do not mix dye lots in same area.

- D. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended by carpet tile manufacturer.
- E. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.
- F. Install pattern parallel to walls and borders.
- G. Stagger joints of carpet tiles so carpet tile grid is offset from access flooring panel grid. Do not fill seams of access flooring panels with carpet adhesive; keep seams free of adhesive.

3.4 CLEANING AND PROTECTION

- A. Perform the following operations immediately after installing carpet tile:
 - 1. Remove excess adhesive, seam sealer, and other surface blemishes using cleaner recommended by carpet tile manufacturer.
 - 2. Remove yarns that protrude from carpet tile surface.
 - 3. Vacuum carpet tile using commercial machine with face-beater element.
- B. Protect installed carpet tile to comply with CRI 104, Section 16, "Protecting Indoor Installations."
- C. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 09 68 13

SECTION 09 91 13 - EXTERIOR PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes surface preparation and the application of paint systems on the following exterior substrates:
 - 1. Galvanized metal.
 - 2. Steel.
 - 3. Wood.
 - 4. Concrete.
- B. All painting work shall match existing sheen, texture, and color at each location.

1.3 DEFINITIONS

- A. Gloss Level 1: (Flat) Not more than 5 units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.
- B. Gloss Level 3: (Eggshell) 10 to 25 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- C. Gloss Level 5: (Semi-gloss) 35 to 70 units at 60 degrees, according to ASTM D 523.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include preparation requirements and application instructions.
- B. Samples for Initial Selection: For each type of topcoat product.
- C. Samples for Verification: For each type of paint system and each color and gloss of topcoat.
 - 1. Submit Samples on rigid backing, 200 mm (8 inches) square.
 - 2. Step coats on Samples to show each coat required for system.
 - 3. Label each coat of each Sample.
 - 4. Label each Sample for location and application area.
- D. Product List: For each product indicated, include the following:
 - 1. Cross-reference to paint system and locations of application areas. Use same designations indicated on Drawings and in schedules.
 - 2. Printout of current "MPI Approved Products List" for each product category specified, with the proposed product highlighted.
 - 3. VOC content.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Paint: 5 percent, but not less than 3.8 L (1 gal.) of each material and color applied.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 7 deg C (45 deg F).
 - 1. Maintain containers in clean condition, free of foreign materials and residue.
 - 2. Remove rags and waste from storage areas daily.

1.7 FIELD CONDITIONS

- A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 10 and 35 deg C (50 and 95 deg F).
- B. Do not apply paints in snow, rain, fog, or mist; when relative humidity exceeds 85 percent; at temperatures less than 3 deg C (5 deg F) above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS**2.1 MANUFACTURERS**

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Benjamin Moore & Co.
 - 2. ICI Paints.
 - 3. BLP Mobile Paints.
 - 4. PPG Architectural Finishes, Inc.
 - 5. Sherwin-Williams Company.

2.2 PAINT, GENERAL

- A. MPI Standards: Provide products that comply with MPI standards indicated and that are listed in its "MPI Approved Products List."
- B. Material Compatibility:
 - 1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 - 2. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.
- C. VOC Content: Provide materials that comply with VOC limits of authorities having jurisdiction.

- D. Colors: As indicated in a color schedule and as selected by Architect.

2.3 PRIMERS/SEALERS

- A. Primer, Bonding, Water Based: MPI #17.

2.4 METAL PRIMERS

- A. Primer, Galvanized, Water Based: MPI #134.

2.5 WOOD PRIMERS

- A. Primer, Latex for Exterior Wood: MPI #6.

2.6 WATER-BASED PAINTS

- A. Latex, Exterior Low Sheen (Gloss Level 3-4): MPI #15.
- B. Latex, Exterior Semi-Gloss (Gloss Level 5): MPI #11.
- C. Latex, Exterior, Gloss (Gloss Level 6: MPI #119.

2.7 SOURCE QUALITY CONTROL

- A. Testing of Paint Materials: Owner reserves the right to invoke the following procedure:
 1. Owner may engage the services of a qualified testing agency to sample paint materials. Contractor will be notified in advance and may be present when samples are taken. If paint materials have already been delivered to Project site, samples may be taken at Project site. Samples will be identified, sealed, and certified by testing agency.
 2. Testing agency will perform tests for compliance with product requirements.
 3. Owner may direct Contractor to stop applying paints if test results show materials being used do not comply with product requirements. Contractor shall remove noncomplying paint materials from Project site, pay for testing, and repaint surfaces painted with rejected materials. Contractor will be required to remove rejected materials from previously painted surfaces if, on repainting with complying materials, the two paints are incompatible.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 1. Wood: 15 percent.

- C. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- D. Verify existing coatings, and confirm compatibility of primers and finish coats with existing coatings.
- E. Proceed with coating application only after unsatisfactory conditions have been corrected.
 - 1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Manual" applicable to substrates and paint systems indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection.
- C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.
- D. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.
- E. Wood Substrates:
 - 1. Scrape and clean knots. Before applying primer, apply coat of knot sealer recommended in writing by topcoat manufacturer for exterior use in paint system indicated.
 - 2. Sand surfaces that will be exposed to view, and dust off.
 - 3. Prime edges, ends, faces, undersides, and backsides of wood.
 - 4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

3.3 APPLICATION

- A. Apply paints according to manufacturer's written instructions and recommendations in "MPI Manual."
 - 1. Use applicators and techniques suited for paint and substrate indicated.
 - 2. Paint surfaces behind movable items same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed items with prime coat only.
 - 3. Paint both sides and edges of exterior doors and entire exposed surface of exterior door frames.
 - 4. Paint entire exposed surface of window frames and sashes.
 - 5. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
 - 6. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.

- B. Tint undercoats same color as topcoat, but tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of same material are to be applied. Provide sufficient difference in shade of undercoats to distinguish each separate coat.
- C. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.
- D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

3.4 FIELD QUALITY CONTROL

- A. Dry Film Thickness Testing: Owner may engage the services of a qualified testing and inspecting agency to inspect and test paint for dry film thickness.
 - 1. Contractor shall touch up and restore painted surfaces damaged by testing.
 - 2. If test results show that dry film thickness of applied paint does not comply with paint manufacturer's written recommendations, Contractor shall pay for testing and apply additional coats as needed to provide dry film thickness that complies with paint manufacturer's written recommendations.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
- B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.6 EXTERIOR PAINTING SCHEDULE

- A. Galvanized-Metal Substrates:
 - 1. Acrylic Coating System:
 - a. Prime Coat: SW DTM Acrylic Primer/ Finish.
 - b. Intermediate Coat: SW DTM Acrylic, exterior, matching topcoat.
 - c. Topcoat: Sherwin Williams DTM Acrylic Coating, Gloss, and to match existing.
- B. Steel Substrates:
 - 1. Acrylic Coating System:
 - a. Prime Coat: KEM Bond HS Primer.
 - b. Intermediate Coat: DTM Acrylic Gloss.
 - c. Topcoat: DTM Acrylic Gloss, and to match existing.
- C. Wood Substrates: Including wood trim, soffits, and fascia.

1. Latex System:

- a. Prime Coat: Primer, latex for exterior wood, MPI #6.
- b. Intermediate Coat: Latex, exterior, matching topcoat.
- c. Topcoat: Latex, exterior semi-gloss (Gloss Level 5), MPI #11 and to match existing.

D. Concrete, Nontraffic Surfaces:

1. Acrylic/ Latex System – Basis of Design:

- a. Prime Coat: Loxon Concrete & Masonry Latex Primer/ Sealer – Sherwin Williams A24W8300.
- b. Intermediate Coat: Loxon Acrylic Coating – Sherwin Williams A24W300, matching topcoat.
- c. Topcoat: Loxon Acrylic Coating, exterior, flat – Sherwin Williams A24W300 (MPI Gloss Level 1), and to match existing.

END OF SECTION 09 91 13

SECTION 09 91 23 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 SECTION REQUIREMENTS

- A. Submittals:
 - 1. Product Data.
 - 2. Samples.
- B. Mockups: Full-coat finish Sample of each type of coating, color, and substrate, applied where directed.
- C. Extra Materials: Deliver to Owner 3.8 L (1 gal.) of each color and type of finish-coat paint used on Project, in containers, properly labeled and sealed.
- D. Work includes painting of exposed structure, decking, gypsum board walls & ceilings, ductwork, supports, and fasteners in open ceiling areas. Match existing colors, sheens, and textures in each location. Intent is to paint entire walls and ceilings where repairs are made to substrates.

PART 2 - PRODUCTS

2.1 PAINT

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Benjamin Moore & Co.
 - 2. BLP Mobile Paint Manufacturing.
 - 3. Dulux (formerly ICI Paints); a brand of AkzoNobel.
 - 4. Sherwin-Williams Company (The).
- B. MPI Standards: Provide materials that comply with MPI standards indicated and listed in its "MPI Approved Products List."
 - 1. Block Filler, Latex: MPI #4.
 - 2. Primer Sealer, Latex: MPI #50.
 - 3. Primer, Alkali Resistant, Water Based: MPI #3.
 - 4. Primer, Latex, for Interior Wood: MPI #39.
 - 5. Latex, Interior, Flat, (Gloss Level 1): MPI #53.
 - 6. Latex, Interior, (Gloss Level 4): MPI #43.
 - 7. Latex, Interior, Semigloss, (Gloss Level 5): MPI #54.
 - 8. Floor Enamel, Alkyd, Gloss (Gloss Level 6): MPI #27.
 - 9. Acoustical Tile and Ceiling Coating.
- C. Material Compatibility: Provide materials that are compatible with one another and with substrates.
 - 1. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.
- D. Colors: As selected by Architect from manufacturer's full range. Benjamin Moore used as basis for color selections.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Comply with recommendations in MPI's "MPI Architectural Painting Specification Manual" applicable to substrates indicated.
- B. Remove hardware, lighting fixtures, and similar items that are not to be painted. Mask items that cannot be removed. Reinstall items in each area after painting is complete.
- C. Clean and prepare surfaces in an area before beginning painting in that area. Schedule painting so cleaning operations will not damage newly painted surfaces.

3.2 APPLICATION

- A. Comply with recommendations in MPI's "MPI Architectural Painting Specification Manual" applicable to substrates indicated.
- B. Paint exposed surfaces, new and existing, unless otherwise indicated.
 - 1. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces.
 - 2. Paint surfaces behind permanently fixed equipment or furniture with prime coat only.
 - 3. Paint the back side of access panels.
 - 4. Color-code mechanical piping in accessible ceiling spaces.
 - 5. Do not paint prefinished items, items with an integral finish, operating parts, and labels unless otherwise indicated.
- C. Apply paints according to manufacturer's written instructions.
 - 1. Use brushes only where the use of other applicators is not practical.
 - 2. Use rollers for finish coat on interior walls and ceilings.
- D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.
 - 1. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

3.3 INTERIOR PAINT APPLICATION SCHEDULE

- A. Steel:
 - 1. Semigloss, Quick-Dry Enamel: Two coats over quick-drying alkyd metal primer: MPI INT 5.1A.
 - 2. Match existing at each location.
- B. Galvanized Metal:
 - 1. Semigloss Enamel: Two coats over waterborne galvanized-metal primer: MPI INT 5.3J.
 - 2. Match existing at each location.
- C. Wood: Including wood trim.

1. Semigloss Latex: Two coats over latex primer for wood: MPI INT 6.3T.
2. Match existing at each location.

D. Gypsum Board and Gypsum/Cement Plaster:

1. Satin or Eggshell 3 Acrylic: Two coats over latex primer/sealer: MPI INT 9.2A.
2. Match existing at each location.

E. Spray Textures: As required to match repairs to existing ceilings, concrete structure, and walls at each location.

END OF SECTION 09 91 23

